

## THESE TERMS GOVERN YOUR USE OF THIS DOCUMENT

**Your use of this Ontario Geological Survey document (the “Content”) is governed by the terms set out on this page (“Terms of Use”). By downloading this Content, you (the “User”) have accepted, and have agreed to be bound by, the Terms of Use.**

**Content:** This Content is offered by the Province of Ontario’s *Ministry of Northern Development and Mines* (MNDM) as a public service, on an “as-is” basis. Recommendations and statements of opinion expressed in the Content are those of the author or authors and are not to be construed as statement of government policy. You are solely responsible for your use of the Content. You should not rely on the Content for legal advice nor as authoritative in your particular circumstances. Users should verify the accuracy and applicability of any Content before acting on it. MNDM does not guarantee, or make any warranty express or implied, that the Content is current, accurate, complete or reliable. MNDM is not responsible for any damage however caused, which results, directly or indirectly, from your use of the Content. MNDM assumes no legal liability or responsibility for the Content whatsoever.

**Links to Other Web Sites:** This Content may contain links, to Web sites that are not operated by MNDM. Linked Web sites may not be available in French. MNDM neither endorses nor assumes any responsibility for the safety, accuracy or availability of linked Web sites or the information contained on them. The linked Web sites, their operation and content are the responsibility of the person or entity for which they were created or maintained (the “Owner”). Both your use of a linked Web site, and your right to use or reproduce information or materials from a linked Web site, are subject to the terms of use governing that particular Web site. Any comments or inquiries regarding a linked Web site must be directed to its Owner.

**Copyright:** Canadian and international intellectual property laws protect the Content. Unless otherwise indicated, copyright is held by the Queen’s Printer for Ontario.

It is recommended that reference to the Content be made in the following form: <Author’s last name>, <Initials> <year of publication>. <Content title>; Ontario Geological Survey, <Content publication series and number>, <total number of pages>p.

**Use and Reproduction of Content:** The Content may be used and reproduced only in accordance with applicable intellectual property laws. *Non-commercial* use of unsubstantial excerpts of the Content is permitted provided that appropriate credit is given and Crown copyright is acknowledged. Any substantial reproduction of the Content or any *commercial* use of all or part of the Content is prohibited without the prior written permission of MNDM. Substantial reproduction includes the reproduction of any illustration or figure, such as, but not limited to graphs, charts and maps. Commercial use includes commercial distribution of the Content, the reproduction of multiple copies of the Content for any purpose whether or not commercial, use of the Content in commercial publications, and the creation of value-added products using the Content.

### Contact:

FOR FURTHER INFORMATION ON	PLEASE CONTACT:	BY TELEPHONE:	BY E-MAIL:
The Reproduction of Content	MNDM Publication Services	Local: (705) 670-5691 Toll Free: 1-888-415-9845, ext. 5691 (inside Canada, United States)	<a href="mailto:Pubsales@ndm.gov.on.ca">Pubsales@ndm.gov.on.ca</a>
The Purchase of MNDM Publications	MNDM Publication Sales	Local: (705) 670-5691 Toll Free: 1-888-415-9845, ext. 5691 (inside Canada, United States)	<a href="mailto:Pubsales@ndm.gov.on.ca">Pubsales@ndm.gov.on.ca</a>
Crown Copyright	Queen’s Printer	Local: (416) 326-2678 Toll Free: 1-800-668-9938 (inside Canada, United States)	<a href="mailto:Copyright@gov.on.ca">Copyright@gov.on.ca</a>

**LES CONDITIONS CI-DESSOUS RÉGISSENT L'UTILISATION DU PRÉSENT DOCUMENT.**

***Votre utilisation de ce document de la Commission géologique de l'Ontario (le « contenu ») est régie par les conditions décrites sur cette page (« conditions d'utilisation »). En téléchargeant ce contenu, vous (l'« utilisateur ») signifiez que vous avez accepté d'être lié par les présentes conditions d'utilisation.***

**Contenu :** Ce contenu est offert en l'état comme service public par le *ministère du Développement du Nord et des Mines* (MDNM) de la province de l'Ontario. Les recommandations et les opinions exprimées dans le contenu sont celles de l'auteur ou des auteurs et ne doivent pas être interprétées comme des énoncés officiels de politique gouvernementale. Vous êtes entièrement responsable de l'utilisation que vous en faites. Le contenu ne constitue pas une source fiable de conseils juridiques et ne peut en aucun cas faire autorité dans votre situation particulière. Les utilisateurs sont tenus de vérifier l'exactitude et l'applicabilité de tout contenu avant de l'utiliser. Le MDNM n'offre aucune garantie expresse ou implicite relativement à la mise à jour, à l'exactitude, à l'intégralité ou à la fiabilité du contenu. Le MDNM ne peut être tenu responsable de tout dommage, quelle qu'en soit la cause, résultant directement ou indirectement de l'utilisation du contenu. Le MDNM n'assume aucune responsabilité légale de quelque nature que ce soit en ce qui a trait au contenu.

**Liens vers d'autres sites Web :** Ce contenu peut comporter des liens vers des sites Web qui ne sont pas exploités par le MDNM. Certains de ces sites pourraient ne pas être offerts en français. Le MDNM se dégage de toute responsabilité quant à la sûreté, à l'exactitude ou à la disponibilité des sites Web ainsi reliés ou à l'information qu'ils contiennent. La responsabilité des sites Web ainsi reliés, de leur exploitation et de leur contenu incombe à la personne ou à l'entité pour lesquelles ils ont été créés ou sont entretenus (le « propriétaire »). Votre utilisation de ces sites Web ainsi que votre droit d'utiliser ou de reproduire leur contenu sont assujettis aux conditions d'utilisation propres à chacun de ces sites. Tout commentaire ou toute question concernant l'un de ces sites doivent être adressés au propriétaire du site.

**Droits d'auteur :** Le contenu est protégé par les lois canadiennes et internationales sur la propriété intellectuelle. Sauf indication contraire, les droits d'auteurs appartiennent à l'Imprimeur de la Reine pour l'Ontario.

Nous recommandons de faire paraître ainsi toute référence au contenu : nom de famille de l'auteur, initiales, année de publication, titre du document, Commission géologique de l'Ontario, série et numéro de publication, nombre de pages.

**Utilisation et reproduction du contenu :** Le contenu ne peut être utilisé et reproduit qu'en conformité avec les lois sur la propriété intellectuelle applicables. L'utilisation de courts extraits du contenu à des fins *non commerciales* est autorisée, à condition de faire une mention de source appropriée reconnaissant les droits d'auteurs de la Couronne. Toute reproduction importante du contenu ou toute utilisation, en tout ou en partie, du contenu à des fins *commerciales* est interdite sans l'autorisation écrite préalable du MDNM. Une reproduction jugée importante comprend la reproduction de toute illustration ou figure comme les graphiques, les diagrammes, les cartes, etc. L'utilisation commerciale comprend la distribution du contenu à des fins commerciales, la reproduction de copies multiples du contenu à des fins commerciales ou non, l'utilisation du contenu dans des publications commerciales et la création de produits à valeur ajoutée à l'aide du contenu.

**Renseignements :**

<b>POUR PLUS DE RENSEIGNEMENTS SUR</b>	<b>VEUILLEZ VOUS ADRESSER À :</b>	<b>PAR TÉLÉPHONE :</b>	<b>PAR COURRIEL :</b>
<b>la reproduction du contenu</b>	Services de publication du MDNM	Local : (705) 670-5691 Numéro sans frais : 1 888 415-9845, poste 5691 (au Canada et aux États-Unis)	<a href="mailto:Pubsales@ndm.gov.on.ca">Pubsales@ndm.gov.on.ca</a>
<b>l'achat des publications du MDNM</b>	Vente de publications du MDNM	Local : (705) 670-5691 Numéro sans frais : 1 888 415-9845, poste 5691 (au Canada et aux États-Unis)	<a href="mailto:Pubsales@ndm.gov.on.ca">Pubsales@ndm.gov.on.ca</a>
<b>les droits d'auteurs de la Couronne</b>	Imprimeur de la Reine	Local : 416 326-2678 Numéro sans frais : 1 800 668-9938 (au Canada et aux États-Unis)	<a href="mailto:Copyright@gov.on.ca">Copyright@gov.on.ca</a>

# Ontario Geological Survey

## Northern Ontario Engineering Geology Terrain Study 85

# BATCHAWANA AREA

(NTS 41N/SE)

## District of Algoma

by

D.F. McQuay

1980



Ontario

Ministry of  
Natural  
Resources

Hon. James A.C. Auld  
Minister

Dr. J.K. Reynolds  
Deputy Minister

Ministry of  
Northern  
Affairs

Hon. Leo Bernier  
Minister

Art Herridge  
Deputy Minister

THIS PROJECT WAS FUNDED BY  
THE ONTARIO MINISTRY OF NORTHERN AFFAIRS  
AND IS MANAGED BY  
THE ONTARIO MINISTRY OF NATURAL RESOURCES

---

*Every possible effort is made to ensure the accuracy of the information contained in this report, but the Ministry of Natural Resources does not assume any liability for errors that may occur. Source references are included in the report and users may wish to verify critical information.*

---

Publications of the Ontario Ministry of Natural Resources and price list are available through the *Map Unit, Public Service Centre, Room 6404, Whitney Block, Queen's Park, Toronto*, and the *Ontario Government Bookstore, 880 Bay Street, Toronto*.

Orders for publications should be accompanied by cheque or money order payable to the *Treasurer of Ontario*.

ISSN 0709-4671  
ISBN 0-7743-4361-3

---

Parts of this publication may be quoted if credit is given. It is recommended that reference to this report be made in the following form:

McQuay, D.F.

1980: Batchawana Area (NTS 41N/SE), District of Algoma; Ontario Geological Survey, Northern Ontario Engineering Geology Terrain Study 85, 13 p. Accompanied by Map 5011, scale: 1:100 000.

1200-80-H of C

# CONTENTS

	Page
1.0 Introduction . . . . .	1
2.0 Geological Setting . . . . .	2
2.1 Bedrock . . . . .	2
2.2 Quaternary . . . . .	3
3.0 Engineering Terrain Units . . . . .	3
3.1 Bedrock Landforms . . . . .	3
3.1.1 Description . . . . .	3
3.1.2 Significance . . . . .	4
3.2 Glaciofluvial Landforms . . . . .	5
3.2.1 Description . . . . .	5
3.2.2 Significance . . . . .	7
3.3 Glaciolacustrine Landforms . . . . .	8
3.3.1 Description . . . . .	8
3.3.2 Significance . . . . .	8
3.4 Alluvial and Organic Landforms . . . . .	9
3.4.1 Description . . . . .	9
3.4.2 Significance . . . . .	10
4.0 Summary of Engineering Significance . . . . .	10
5.0 References . . . . .	12

## TABLE

1 – Summary of engineering significance . . . . .	11
---	----

## MAP (accompanying report)

Map 5011 (coloured) – Northern Ontario Engineering Geology Terrain Study,  
Data Base Map, Batchawana (NTS 41N/SE). Scale 1:100 000.



Northern Ontario  
Engineering Geology Terrain Study 85

BATCHAWANA AREA

(NTS 41N/SE)

District of Algoma

by

D.F. McQuay<sup>1</sup>

## 1.0 INTRODUCTION:

This report contains an inventory of regional engineering terrain conditions in the Batchawana area, District of Algoma. The area, which covers NTS block 41N/SE, lies between Latitudes 47°00'N and 47°30'N and Longitudes 84°00'W and 85°00'W. This report forms part of a series of publications which provide similar terrain data for some 370 000 km<sup>2</sup> of northern Ontario.

The purpose of the mapping is to provide a guide for engineering and resource planning functions at a level of detail consistent with a scale of 1:100 000. The terrain information is contained on the Data Base Map (OGS Map 5011, accompanying this report).

Interpretation of existing black and white aerial photographs, at a scale of approximately 1:54 000, was the primary method of obtaining this terrain information. The interpretation was compared with published and

---

<sup>1</sup> Earth Scientist, Gartner Lee Associates Limited, Markham, Ontario.

unpublished literature which documented previous field visits and observations. During the summer of 1977, roads in the area were traversed and observed terrain conditions recorded as further verification of the office studies. Thus, the map represents a reconnaissance overview of the engineering conditions of the terrain.

An engineering terrain legend was developed to facilitate the mapping and to provide a common information base for the entire map series. This legend is shown on the accompanying Data Base Map. Further information on the mapping techniques, legend format, and possible uses of this terrain data is available in the "Ontario Engineering Geology Terrain Study Users' Manual" (Gartner, Mollard, and Roed 1980), a companion publication to this series of maps and reports.

## **2.0 GEOLOGICAL SETTING:**

### **2.1 BEDROCK:**

With the exception of a few small, off-shore islands in Lake Superior consisting of Cambrian sandstone, shale, and conglomerate, the entire map area is underlain by rocks of Precambrian age (Giblin and Leahy 1967). The rugged bedrock hills that predominate in the area are sparsely covered with overburden deposits and rock outcrops are common.

The major rock types in the northwestern half and southeastern part of the area are granite and syenite, with some zones of granite gneiss. These Early Precambrian felsic intrusive rocks have been given a "least" mineral rating potential by Springer (1977).

A broad belt of Early Precambrian metavolcanics trends northeasterly across the southern part of the map-area. These rocks, together with the Keweenawan sedimentary and volcanic rocks located east of Hibbard Bay in the southwestern corner of the area, have a high to medium mineral potential and host a variety of mineral occurrences, including copper, lead, zinc, silver, and gold (Springer 1977). Until recently, several mines in the southwestern part of this belt produced relatively large quantities of mainly copper ore. The most important were the Coppercorp Mine, located east of Hibbard Bay, and the Tribag Mine in Nicolet Township.

## 2.2 QUATERNARY:

The last glacial advance in the area was toward the south-southwest. Esker ridges, which are good indicators of ice movement directions during retreat of the ice front, are found in the northern part of the map-area. Glaciation of the area resulted mainly in deposition of thin, discontinuous, sandy ground moraine. This condition is typical of the vast majority of the area. There were no ice-contact morainal features noted in the area.

During deglaciation, meltwaters from decaying ice masses deposited sand and gravel in spillway channels. These meltwater channels were often larger versions of the present-day rivers in the area, and in a few places they broaden into flat outwash plains composed of granular materials. Examples of this occur south of the Montreal River near the Lake Superior shore and near the eastern margin of the map-area.

The lower ground, along the Lake Superior shore, below an elevation of about 300 m, was inundated toward the end of the Pleistocene by a high level, post-Algonquin glacial lake. As a result, raised beaches of sand and gravel were deposited. However, the high rocky shores along this part of Lake Superior were generally washed bare, and beach materials accumulated in only a few protected areas.

Since deglaciation, floodplain alluvium has been deposited along most of the rivers and streams. These materials are mainly silty sand and gravel. Organic deposits have accumulated in many depressions within the bedrock terrain and also along poorly drained river valleys.

## 3.0 ENGINEERING TERRAIN UNITS:

### 3.1 BEDROCK LANDFORMS:

#### 3.1.1 Description:

*Rock knob* (RN) terrain is by far the dominant landform in the Batchawana map-area. Relative relief of the rugged bedrock hills is commonly in excess of 60 to 70 m. Numerous joints and faults in the rock contribute to the highly variable and complex topography. Spectacular canyons,

such as that of the Agawa River which is about 200 m deep, trace lineaments or faults in the bedrock.

The rock terrain is mantled by a thin, discontinuous layer of ground moraine. It is usually less than 1 m thick near the crests of the outcrops, but may thicken to as much as 3 m on the lower slopes and in valleys between bedrock hills. The till is sandy in texture, and cobbles and boulders are common. In general, the bedrock terrain is well drained, but localized organic bogs occur in depressions and occasionally in areas of low relief.

A typical letter code depicting the bedrock terrain is:

$$\frac{RN(tMG)}{Hj-D}$$

Rock knobs are the dominant landform, while ground moraine is a subordinate feature occurring as an intermittent veneer of till over the bedrock. Topography is rugged and jagged, and relative relief is high. The ground surface is well drained and dry.

At a few isolated locations, the ground moraine appears thicker and covers the bedrock uniformly. A letter code used to describe such areas is:

$$\frac{tMG(RN, pOT)}{Mu-D}$$

This indicates that ground moraine is the most common surface material. Rock knobs and organic terrain are associated subordinate landforms. Relief is moderately high and the topography is undulating. Surface drainage conditions are usually dry.

### 3.1.2 Significance:

**RESOURCES:** Portions of the rock can be used for crushed stone purposes, but detailed evaluations of suitability for aggregate use would be required. Ground water resources within the bedrock will be limited to fractures, faults, and fissures. The occurrence of aquifers is unpredictable and the terrain has only fair potential for ground water supplies.

Sources of borrow material for local use might be found in the few scattered areas of possible deeper, continuous till.

Bedrock terrain in the southern part of the map-area has high mineral potential. The appropriate published government maps, listed in the references for this report, should be consulted for further details.

**GENERAL CONSTRUCTION:** The rugged, irregular, and complex slopes of the bedrock terrain present major constraints for development and construction. Excavations, in most instances, will require blasting, and material handling in rock cuts and fills will be costly. Foundation bearing conditions should be excellent, but steep slopes present serious constraints for the siting of buildings. Locating transportation routes in the bedrock terrain is complicated by severe grades, potentially expensive cut-and-fill operations, and adverse horizontal alignments. The shallow soils that occur on the steep rock slopes are susceptible to erosion when cleared of vegetation.

**WASTE DISPOSAL:** Bedrock terrain is generally unsuitable for all types of waste disposal. Development of lagoons or tile fields would require costly rock handling and importation of soil fill. In addition, there is often insufficient cover material for sanitary landfills.

## **3.2 GLACIOFLUVIAL LANDFORMS:**

### **3.2.1 Description:**

*Outwash plains* or *valley trains* (GO) are the most common Quaternary landforms in the area. They are composed of sand and gravel, generally with a high proportion of sand. The deposits are often found in river valleys which were once major channels for glacial meltwater. In these settings, they occur as discontinuous but relatively level terraces that are interrupted by river alluvial plains and bedrock. With the exception of the deposits around the lower part of the Montreal River and extending south toward Pancake Lake, they are small or shallow and appear to have low aggregate reserves. Large terraces on the lower Montreal River indicate potentially deep granular deposits.

A typical letter code depicting these deposits and others immediately to the south is:

$$\frac{\text{sgGO}}{\text{Lpt-D}}$$

The landform is an outwash feature (GO) composed of sand and gravel, generally with a high proportion of sand. The relief is low and the ground surface is level and terraced. In general, good drainage conditions prevail and the surface materials are dry.

A comparatively large deposit near the eastern margin of the area appears to have low aggregate potential because of its association with bedrock knobs and wet surface conditions. The letter code for this unit is:

$$\frac{\text{sGO(RN, pOT)}}{\text{Lp-Dh(M)}}$$

It indicates that the outwash is the dominant landform and that the sediments are probably sandy in texture. Rock knobs and organic wetlands are scattered throughout the area. The unit has a generally level surface with low relief. Surface drainage conditions are dry, but a high water table is suspected. The subordinate landforms have mixed wet and dry surface drainage.

Letter codes such as

$$\frac{\text{sgGO(sgAP)}}{\text{Lpt-D(M)}}$$

indicate that the outwash along some of the river valleys is associated with alluvial plain sediments.

*Eskers* (GE) are generally shown by the graphic symbol (>>>>>), which implies single ridges of sand and gravel. These ridges are usually small, and probably do not exceed 5 or 6 m in height. In the southwestern and south-central parts of the map-area, esker complexes occur in association with other landforms, particularly outwash and ground moraine.

Letter codes portraying these situations are:

$$\frac{\text{sgGO(sgGE)}}{\text{Lpk-D}}$$

and

$$\frac{\text{gsGE, tsMG/R(RN, pOT)}}{\text{Ln-M}}$$

The latter code suggests a complex of sandy gravel esker ridges and sandy ground moraine that forms a shallow mantle over the bedrock. Associated subordinate landforms are rock knobs and organic wetlands. Relief is low, the topography is hummocky, and surface drainage conditions are mixed wet and dry.

### 3.2.2 Significance:

**RESOURCES:** Many of the outwash deposits represent good sources of sand and gravel for local use. Gravel pits have been developed in some of these deposits, and materials are probably used for general fill and road construction. The best deposits, which occur in the west-central part of the map-area, are generally accessible by existing roads. Most of the esker ridges are found in the remote northern part of the area; if developed, these should provide good sources of aggregate for local use.

**GENERAL CONSTRUCTION:** Glaciofluvial landforms generally provide good conditions for construction. Materials excavate and grade easily; bearing capacities for foundations, in most cases, should be adequate. Also, since many of the outwash deposits occur in river valleys, they provide the best overall conditions for locating route alignments.

In some instances, complex ground conditions present potential problems for construction. Where high water tables are suspected, dewatering of excavations might be necessary and foundations will require proper drainage works or elevating with fill. Excavations may encounter bedrock in areas of shallow overburden, thus increasing construction costs. Hummocky terrain, especially where esker complexes are present, may involve extensive grading as well as cut-and-fill operations.

**WASTE DISPOSAL:** Glaciofluvial landforms do not always provide the best sites for disposal of either solid or liquid waste. Disposal in such areas will have to deal with the possible contamination of both ground and surface waters. This is because glaciofluvial materials can be very permeable, allowing contaminants to migrate easily to nearby streams or to the water table. Careful investigations should be undertaken to determine the environmental impact of waste disposal in glaciofluvial terrain.

### 3.3 GLACIOLACUSTRINE LANDFORMS:

#### 3.3.1 Description:

The only glaciolacustrine landform in the Batchawana map-area is the *raised beaches* (LB) along the Lake Superior shoreline. They were formed by the post-Algonquin glacial lake which, at its highest stage, was about 100 m above the present level of Lake Superior. These deposits of sand and gravel are mainly confined to lowland pockets surrounded by bedrock hills. Shoreline scarps, which mark levels of the former glacial lake, are quite evident on the airphotos and are shown graphically on the Data Base Map (OGS Map 5011, accompanying this report).

Materials are often sandy with variable amounts of gravel, although good areas of cobbly gravel do exist. A number of the deposits are potentially thick. A typical letter code describing these features is:

sgLB  
Lst-D

It indicates that the landform is a lacustrine beach composed of sand and gravel, but likely containing more sand than gravel. The relief is low and the landform slopes gently in terraces toward Lake Superior. Surface materials are well drained and dry.

Just south of Montreal River Harbour, excellent examples of these features are protected for their historical significance in Montreal River Provincial Park.

#### 3.3.2 Significance:

**RESOURCES:** The lacustrine beaches have good potential for providing sufficient sand and gravel aggregate and general borrow material for local use. Several pits have been developed in these deposits, the material extracted having been used for construction of roads and other engineering projects.

**GENERAL CONSTRUCTION:** These deposits are generally suitable for construction purposes. The materials excavate and grade easily, and foundations can be sited with minimal difficulty. Side slopes in deep

cuts may have zones of instability which will require benching and revegetation.

**WASTE DISPOSAL:** The sandy beach deposits are potentially suitable for the location of septic tile fields. However, the permeable materials in these landforms represent a constraint for sanitary landfills and liquid waste lagoons. Care must be taken to avoid contamination of both surface and ground waters. Subsurface investigations should be undertaken prior to the siting of any type of waste disposal facility.

### 3.4 ALLUVIAL AND ORGANIC LANDFORMS:

#### 3.4.1 Description:

*Alluvial plains (AP)*, many of them too small to be shown on the map, are associated with most rivers and streams in the Batchawana map-area. The alluvial materials are often derived from outwash deposits and thus, have a similar granular texture. The deposit along the lower Agawa River exemplifies this relationship and is symbolized by:

$$\frac{\text{sgAP}(\text{sgGO})}{\text{Lct-M(D)}}$$

Here, the alluvial plain is composed of gravelly sand and, in places, is associated with terraces of sand and gravel outwash material. Relief is low and the feature is terraced and channeled by the river. Surface drainage is mixed wet and dry on the alluvial plain, whereas the outwash deposits are dry.

Organic deposits are sometimes associated with alluvial plains. Drainage conditions in this landform are often poor and flooding can occur. Many streams, especially the smaller ones, have sparse alluvial deposits and are often floored in bedrock.

Areas of *organic terrain (OT)* are widespread and are associated with depressions in the bedrock and poorly drained alluvial plains. In the latter case, a typical letter code is:

$$\frac{\text{pOT}(\text{sAP})}{\text{Lp-W}}$$

The organic terrain consists of peat and the subordinate landform is a sandy alluvial plain. The unit has low relief, level topography, and generally wet surface drainage conditions.

#### **3.4.2 Significance:**

Development on alluvial plains will encounter many problems. Soft ground conditions, poor surface drainage, flooding, and high ground water levels are the main engineering constraints. There may be some potential for small scale extraction of granular materials, particularly in valleys containing outwash deposits.

Organic terrain presents many problems for most types of human activity and is generally unsuitable for development. The main problems for construction involve soft and highly compressible soils, flooding conditions, and poor accessibility.

### **4.0 SUMMARY OF ENGINEERING SIGNIFICANCE:**

Most of the Batchawana map-area is comprised of rugged bedrock terrain. The bedrock presents major problems for all types of development. Areas providing the best conditions for general construction and development are the outwash and lacustrine beach landforms. These are concentrated in the western part of the map-area, near the shore of Lake Superior. The outwash and beach deposits also represent potential sources of sand and gravel. The best access routes through the bedrock terrain are provided by the major river valleys.

Table 1 is a summary of the general engineering significance of the more common terrain units found in the area. This table is intended only as a guide to help the reader in assessing the overall significance of the map-units. Site-specific work is necessary to better define actual ground conditions, such as drainage and slope, which are not considered in the table, but which may affect the engineering significance of the various terrain units.

TABLE 1:

SUMMARY OF ENGINEERING SIGNIFICANCE

RESOURCE POTENTIAL	BEDROCK	MORAINAL		GLACIOFLUVIAL		GLACIO-LACUSTRINE	ALLUVIAL	ORGANIC
		tMG/R	sgGO	sgGE	sgLB			
SAND & GRAVEL	Poor	Poor	Good	Good	Fair to Good	Fair to Poor	Poor	Poor
	Poor	Poor	Good	Fair to Poor	Fair to Good	Fair	Poor	Poor
	Blasting	Fair to Poor	Good	Fair to Good	Fair to Good	Poor	Poor	Poor
LIGHT CONSTRUCTION CONDITIONS	Excellent	Good	Good	Good	Fair to Good	Poor	Poor	Poor
	Difficult	Fair	Good	Good	Good	Fair	Poor	Poor
	Rockfill	Fair	Good	Good	Good	Fair	Poor	Poor
WASTE DISPOSAL SUITABILITY	Very Poor	Fair	Good	Fair to Poor	Good	Poor	Poor	Poor
	Poor	Fair to Poor	Fair to Poor	Poor	Fair to Poor	Poor	Poor	Poor
	Poor	Fair to Poor	Fair to Poor	Poor	Poor	Poor	Poor	Poor

## 5.0 REFERENCES

Boissonneau, A.N.

1965: Surficial Geology, Algoma, Sudbury, Timiskaming and Nipissing; Ontario Department of Lands and Forests, Map S465, scale 1:506 880 or 1 inch to 8 miles. Surficial geology 1962, 1963.

1968: Glacial History of Northeastern Ontario II. The Timiskaming-Algoma Area; Canadian Journal of Earth Sciences, Vol. 5, No. 1. p. 97-109.

Gartner, John F., Mollard, J.D., and Roed, M.A.

1980: Ontario Engineering Geology Terrain Study Users' Manual; Ontario Geological Survey, Open File Report 5288, 99 p.

Gartner Lee Associates Limited

1974: Aggregate Resources Search – North Shores of Lake Superior and Huron, Districts of Thunder Bay and Algoma; Ontario Division of Mines, Open File Report 5117, 116 p.

Giblin, P.E. and Leahy, E.J.

1967: Sault Ste. Marie-Elliot Lake Sheet, Algoma, Manitoulin, and Sudbury Districts; Ontario Department of Mines, Map 2108, Geological Compilation Series, scale 1:253 440 or 1 inch to 4 miles. Geological compilation 1964, 1965.

Nuffield, E.W.

1956: Geology of the Montreal River Area; Ontario Department of Mines, Vol. 64, Pt. 3 (1955), 32 p. Accompanied by Map 1955-1, scale 1:31 680 or 1 inch to ½ mile.

Prest, V.K.

1970: Quaternary Geology of Canada; p. 675-764 in Geology and Economic Minerals of Canada, edited by R.J.W. Douglas, Geological Survey of Canada, Economic Geology Report No. 1, 5th edition, 838 p.

Pye, E.G.

1969: Geology and Scenery, North Shore of Lake Superior; Ontario Department of Mines, Geological Guide Book No. 2, 148 p.

Springer, Janet

1977: Ontario Mineral Potential, Michipicoten Sheet, Districts of Algoma and Thunder Bay; Ontario Geological Survey, Preliminary Map P.1516, Mineral Deposits Series, scale 1:250 000. Compilation 1976, 1977.



# Ontario Geological Survey

## Northern Ontario Engineering Geology Terrain Study 85

# BATCHAWANA AREA

(NTS 41N/SE)

## District of Algoma

by

D.F. McQuay

1980



Ontario

Ministry of  
Natural  
Resources

Hon. James A.C. Auld  
Minister

Dr. J.K. Reynolds  
Deputy Minister

Ministry of  
Northern  
Affairs

Hon. Leo Bernier  
Minister

Art Herridge  
Deputy Minister

THIS PROJECT WAS FUNDED BY  
THE ONTARIO MINISTRY OF NORTHERN AFFAIRS  
AND IS MANAGED BY  
THE ONTARIO MINISTRY OF NATURAL RESOURCES

---

*Every possible effort is made to ensure the accuracy of the information contained in this report, but the Ministry of Natural Resources does not assume any liability for errors that may occur. Source references are included in the report and users may wish to verify critical information.*

---

Publications of the Ontario Ministry of Natural Resources and price list are available through the *Map Unit, Public Service Centre, Room 6404, Whitney Block, Queen's Park, Toronto*, and the *Ontario Government Bookstore, 880 Bay Street, Toronto*.

Orders for publications should be accompanied by cheque or money order payable to the *Treasurer of Ontario*.

ISSN 0709-4671  
ISBN 0-7743-4361-3

---

Parts of this publication may be quoted if credit is given. It is recommended that reference to this report be made in the following form:

McQuay, D.F.

1980: Batchawana Area (NTS 41N/SE), District of Algoma; Ontario Geological Survey, Northern Ontario Engineering Geology Terrain Study 85, 13 p. Accompanied by Map 5011, scale: 1:100 000.

1200-80-H of C

# CONTENTS

	Page
1.0 Introduction . . . . .	1
2.0 Geological Setting . . . . .	2
2.1 Bedrock . . . . .	2
2.2 Quaternary . . . . .	3
3.0 Engineering Terrain Units . . . . .	3
3.1 Bedrock Landforms . . . . .	3
3.1.1 Description . . . . .	3
3.1.2 Significance . . . . .	4
3.2 Glaciofluvial Landforms . . . . .	5
3.2.1 Description . . . . .	5
3.2.2 Significance . . . . .	7
3.3 Glaciolacustrine Landforms . . . . .	8
3.3.1 Description . . . . .	8
3.3.2 Significance . . . . .	8
3.4 Alluvial and Organic Landforms . . . . .	9
3.4.1 Description . . . . .	9
3.4.2 Significance . . . . .	10
4.0 Summary of Engineering Significance . . . . .	10
5.0 References . . . . .	12

## TABLE

1 – Summary of engineering significance . . . . .	11
---	----

## MAP (accompanying report)

Map 5011 (coloured) – Northern Ontario Engineering Geology Terrain Study,  
Data Base Map, Batchawana (NTS 41N/SE). Scale 1:100 000.



Northern Ontario  
Engineering Geology Terrain Study 85

BATCHAWANA AREA

(NTS 41N/SE)

District of Algoma

by

D.F. McQuay<sup>1</sup>

## 1.0 INTRODUCTION:

This report contains an inventory of regional engineering terrain conditions in the Batchawana area, District of Algoma. The area, which covers NTS block 41N/SE, lies between Latitudes 47°00'N and 47°30'N and Longitudes 84°00'W and 85°00'W. This report forms part of a series of publications which provide similar terrain data for some 370 000 km<sup>2</sup> of northern Ontario.

The purpose of the mapping is to provide a guide for engineering and resource planning functions at a level of detail consistent with a scale of 1:100 000. The terrain information is contained on the Data Base Map (OGS Map 5011, accompanying this report).

Interpretation of existing black and white aerial photographs, at a scale of approximately 1:54 000, was the primary method of obtaining this terrain information. The interpretation was compared with published and

---

<sup>1</sup> Earth Scientist, Gartner Lee Associates Limited, Markham, Ontario.

unpublished literature which documented previous field visits and observations. During the summer of 1977, roads in the area were traversed and observed terrain conditions recorded as further verification of the office studies. Thus, the map represents a reconnaissance overview of the engineering conditions of the terrain.

An engineering terrain legend was developed to facilitate the mapping and to provide a common information base for the entire map series. This legend is shown on the accompanying Data Base Map. Further information on the mapping techniques, legend format, and possible uses of this terrain data is available in the "Ontario Engineering Geology Terrain Study Users' Manual" (Gartner, Mollard, and Roed 1980), a companion publication to this series of maps and reports.

## **2.0 GEOLOGICAL SETTING:**

### **2.1 BEDROCK:**

With the exception of a few small, off-shore islands in Lake Superior consisting of Cambrian sandstone, shale, and conglomerate, the entire map area is underlain by rocks of Precambrian age (Giblin and Leahy 1967). The rugged bedrock hills that predominate in the area are sparsely covered with overburden deposits and rock outcrops are common.

The major rock types in the northwestern half and southeastern part of the area are granite and syenite, with some zones of granite gneiss. These Early Precambrian felsic intrusive rocks have been given a "least" mineral rating potential by Springer (1977).

A broad belt of Early Precambrian metavolcanics trends northeasterly across the southern part of the map-area. These rocks, together with the Keweenawan sedimentary and volcanic rocks located east of Hibbard Bay in the southwestern corner of the area, have a high to medium mineral potential and host a variety of mineral occurrences, including copper, lead, zinc, silver, and gold (Springer 1977). Until recently, several mines in the southwestern part of this belt produced relatively large quantities of mainly copper ore. The most important were the Coppercorp Mine, located east of Hibbard Bay, and the Tribag Mine in Nicolet Township.

## 2.2 QUATERNARY:

The last glacial advance in the area was toward the south-southwest. Esker ridges, which are good indicators of ice movement directions during retreat of the ice front, are found in the northern part of the map-area. Glaciation of the area resulted mainly in deposition of thin, discontinuous, sandy ground moraine. This condition is typical of the vast majority of the area. There were no ice-contact morainal features noted in the area.

During deglaciation, meltwaters from decaying ice masses deposited sand and gravel in spillway channels. These meltwater channels were often larger versions of the present-day rivers in the area, and in a few places they broaden into flat outwash plains composed of granular materials. Examples of this occur south of the Montreal River near the Lake Superior shore and near the eastern margin of the map-area.

The lower ground, along the Lake Superior shore, below an elevation of about 300 m, was inundated toward the end of the Pleistocene by a high level, post-Algonquin glacial lake. As a result, raised beaches of sand and gravel were deposited. However, the high rocky shores along this part of Lake Superior were generally washed bare, and beach materials accumulated in only a few protected areas.

Since deglaciation, floodplain alluvium has been deposited along most of the rivers and streams. These materials are mainly silty sand and gravel. Organic deposits have accumulated in many depressions within the bedrock terrain and also along poorly drained river valleys.

## 3.0 ENGINEERING TERRAIN UNITS:

### 3.1 BEDROCK LANDFORMS:

#### 3.1.1 Description:

*Rock knob* (RN) terrain is by far the dominant landform in the Batchawana map-area. Relative relief of the rugged bedrock hills is commonly in excess of 60 to 70 m. Numerous joints and faults in the rock contribute to the highly variable and complex topography. Spectacular canyons,

such as that of the Agawa River which is about 200 m deep, trace lineaments or faults in the bedrock.

The rock terrain is mantled by a thin, discontinuous layer of ground moraine. It is usually less than 1 m thick near the crests of the outcrops, but may thicken to as much as 3 m on the lower slopes and in valleys between bedrock hills. The till is sandy in texture, and cobbles and boulders are common. In general, the bedrock terrain is well drained, but localized organic bogs occur in depressions and occasionally in areas of low relief.

A typical letter code depicting the bedrock terrain is:

$$\frac{RN(tMG)}{Hj-D}$$

Rock knobs are the dominant landform, while ground moraine is a subordinate feature occurring as an intermittent veneer of till over the bedrock. Topography is rugged and jagged, and relative relief is high. The ground surface is well drained and dry.

At a few isolated locations, the ground moraine appears thicker and covers the bedrock uniformly. A letter code used to describe such areas is:

$$\frac{tMG(RN, pOT)}{Mu-D}$$

This indicates that ground moraine is the most common surface material. Rock knobs and organic terrain are associated subordinate landforms. Relief is moderately high and the topography is undulating. Surface drainage conditions are usually dry.

### 3.1.2 Significance:

**RESOURCES:** Portions of the rock can be used for crushed stone purposes, but detailed evaluations of suitability for aggregate use would be required. Ground water resources within the bedrock will be limited to fractures, faults, and fissures. The occurrence of aquifers is unpredictable and the terrain has only fair potential for ground water supplies.

Sources of borrow material for local use might be found in the few scattered areas of possible deeper, continuous till.

Bedrock terrain in the southern part of the map-area has high mineral potential. The appropriate published government maps, listed in the references for this report, should be consulted for further details.

**GENERAL CONSTRUCTION:** The rugged, irregular, and complex slopes of the bedrock terrain present major constraints for development and construction. Excavations, in most instances, will require blasting, and material handling in rock cuts and fills will be costly. Foundation bearing conditions should be excellent, but steep slopes present serious constraints for the siting of buildings. Locating transportation routes in the bedrock terrain is complicated by severe grades, potentially expensive cut-and-fill operations, and adverse horizontal alignments. The shallow soils that occur on the steep rock slopes are susceptible to erosion when cleared of vegetation.

**WASTE DISPOSAL:** Bedrock terrain is generally unsuitable for all types of waste disposal. Development of lagoons or tile fields would require costly rock handling and importation of soil fill. In addition, there is often insufficient cover material for sanitary landfills.

## **3.2 GLACIOFLUVIAL LANDFORMS:**

### **3.2.1 Description:**

*Outwash plains* or *valley trains* (GO) are the most common Quaternary landforms in the area. They are composed of sand and gravel, generally with a high proportion of sand. The deposits are often found in river valleys which were once major channels for glacial meltwater. In these settings, they occur as discontinuous but relatively level terraces that are interrupted by river alluvial plains and bedrock. With the exception of the deposits around the lower part of the Montreal River and extending south toward Pancake Lake, they are small or shallow and appear to have low aggregate reserves. Large terraces on the lower Montreal River indicate potentially deep granular deposits.

A typical letter code depicting these deposits and others immediately to the south is:

$$\frac{\text{sgGO}}{\text{Lpt-D}}$$

The landform is an outwash feature (GO) composed of sand and gravel, generally with a high proportion of sand. The relief is low and the ground surface is level and terraced. In general, good drainage conditions prevail and the surface materials are dry.

A comparatively large deposit near the eastern margin of the area appears to have low aggregate potential because of its association with bedrock knobs and wet surface conditions. The letter code for this unit is:

$$\frac{\text{sGO(RN, pOT)}}{\text{Lp-Dh(M)}}$$

It indicates that the outwash is the dominant landform and that the sediments are probably sandy in texture. Rock knobs and organic wetlands are scattered throughout the area. The unit has a generally level surface with low relief. Surface drainage conditions are dry, but a high water table is suspected. The subordinate landforms have mixed wet and dry surface drainage.

Letter codes such as

$$\frac{\text{sgGO(sgAP)}}{\text{Lpt-D(M)}}$$

indicate that the outwash along some of the river valleys is associated with alluvial plain sediments.

*Eskers* (GE) are generally shown by the graphic symbol (>>>>>), which implies single ridges of sand and gravel. These ridges are usually small, and probably do not exceed 5 or 6 m in height. In the southwestern and south-central parts of the map-area, esker complexes occur in association with other landforms, particularly outwash and ground moraine.

Letter codes portraying these situations are:

$$\frac{\text{sgGO(sgGE)}}{\text{Lpk-D}}$$

and

$$\frac{\text{gsGE, tsMG/R(RN, pOT)}}{\text{Ln-M}}$$

The latter code suggests a complex of sandy gravel esker ridges and sandy ground moraine that forms a shallow mantle over the bedrock. Associated subordinate landforms are rock knobs and organic wetlands. Relief is low, the topography is hummocky, and surface drainage conditions are mixed wet and dry.

### 3.2.2 Significance:

**RESOURCES:** Many of the outwash deposits represent good sources of sand and gravel for local use. Gravel pits have been developed in some of these deposits, and materials are probably used for general fill and road construction. The best deposits, which occur in the west-central part of the map-area, are generally accessible by existing roads. Most of the esker ridges are found in the remote northern part of the area; if developed, these should provide good sources of aggregate for local use.

**GENERAL CONSTRUCTION:** Glaciofluvial landforms generally provide good conditions for construction. Materials excavate and grade easily; bearing capacities for foundations, in most cases, should be adequate. Also, since many of the outwash deposits occur in river valleys, they provide the best overall conditions for locating route alignments.

In some instances, complex ground conditions present potential problems for construction. Where high water tables are suspected, dewatering of excavations might be necessary and foundations will require proper drainage works or elevating with fill. Excavations may encounter bedrock in areas of shallow overburden, thus increasing construction costs. Hummocky terrain, especially where esker complexes are present, may involve extensive grading as well as cut-and-fill operations.

**WASTE DISPOSAL:** Glaciofluvial landforms do not always provide the best sites for disposal of either solid or liquid waste. Disposal in such areas will have to deal with the possible contamination of both ground and surface waters. This is because glaciofluvial materials can be very permeable, allowing contaminants to migrate easily to nearby streams or to the water table. Careful investigations should be undertaken to determine the environmental impact of waste disposal in glaciofluvial terrain.

### 3.3 GLACIOLACUSTRINE LANDFORMS:

#### 3.3.1 Description:

The only glaciolacustrine landform in the Batchawana map-area is the *raised beaches* (LB) along the Lake Superior shoreline. They were formed by the post-Algonquin glacial lake which, at its highest stage, was about 100 m above the present level of Lake Superior. These deposits of sand and gravel are mainly confined to lowland pockets surrounded by bedrock hills. Shoreline scarps, which mark levels of the former glacial lake, are quite evident on the airphotos and are shown graphically on the Data Base Map (OGS Map 5011, accompanying this report).

Materials are often sandy with variable amounts of gravel, although good areas of cobbly gravel do exist. A number of the deposits are potentially thick. A typical letter code describing these features is:

sgLB  
Lst-D

It indicates that the landform is a lacustrine beach composed of sand and gravel, but likely containing more sand than gravel. The relief is low and the landform slopes gently in terraces toward Lake Superior. Surface materials are well drained and dry.

Just south of Montreal River Harbour, excellent examples of these features are protected for their historical significance in Montreal River Provincial Park.

#### 3.3.2 Significance:

**RESOURCES:** The lacustrine beaches have good potential for providing sufficient sand and gravel aggregate and general borrow material for local use. Several pits have been developed in these deposits, the material extracted having been used for construction of roads and other engineering projects.

**GENERAL CONSTRUCTION:** These deposits are generally suitable for construction purposes. The materials excavate and grade easily, and foundations can be sited with minimal difficulty. Side slopes in deep

cuts may have zones of instability which will require benching and revegetation.

**WASTE DISPOSAL:** The sandy beach deposits are potentially suitable for the location of septic tile fields. However, the permeable materials in these landforms represent a constraint for sanitary landfills and liquid waste lagoons. Care must be taken to avoid contamination of both surface and ground waters. Subsurface investigations should be undertaken prior to the siting of any type of waste disposal facility.

### 3.4 ALLUVIAL AND ORGANIC LANDFORMS:

#### 3.4.1 Description:

*Alluvial plains (AP)*, many of them too small to be shown on the map, are associated with most rivers and streams in the Batchawana map-area. The alluvial materials are often derived from outwash deposits and thus, have a similar granular texture. The deposit along the lower Agawa River exemplifies this relationship and is symbolized by:

$$\frac{\text{sgAP}(\text{sgGO})}{\text{Lct-M(D)}}$$

Here, the alluvial plain is composed of gravelly sand and, in places, is associated with terraces of sand and gravel outwash material. Relief is low and the feature is terraced and channeled by the river. Surface drainage is mixed wet and dry on the alluvial plain, whereas the outwash deposits are dry.

Organic deposits are sometimes associated with alluvial plains. Drainage conditions in this landform are often poor and flooding can occur. Many streams, especially the smaller ones, have sparse alluvial deposits and are often floored in bedrock.

Areas of *organic terrain (OT)* are widespread and are associated with depressions in the bedrock and poorly drained alluvial plains. In the latter case, a typical letter code is:

$$\frac{\text{pOT}(\text{sAP})}{\text{Lp-W}}$$

The organic terrain consists of peat and the subordinate landform is a sandy alluvial plain. The unit has low relief, level topography, and generally wet surface drainage conditions.

#### **3.4.2 Significance:**

Development on alluvial plains will encounter many problems. Soft ground conditions, poor surface drainage, flooding, and high ground water levels are the main engineering constraints. There may be some potential for small scale extraction of granular materials, particularly in valleys containing outwash deposits.

Organic terrain presents many problems for most types of human activity and is generally unsuitable for development. The main problems for construction involve soft and highly compressible soils, flooding conditions, and poor accessibility.

### **4.0 SUMMARY OF ENGINEERING SIGNIFICANCE:**

Most of the Batchawana map-area is comprised of rugged bedrock terrain. The bedrock presents major problems for all types of development. Areas providing the best conditions for general construction and development are the outwash and lacustrine beach landforms. These are concentrated in the western part of the map-area, near the shore of Lake Superior. The outwash and beach deposits also represent potential sources of sand and gravel. The best access routes through the bedrock terrain are provided by the major river valleys.

Table 1 is a summary of the general engineering significance of the more common terrain units found in the area. This table is intended only as a guide to help the reader in assessing the overall significance of the map-units. Site-specific work is necessary to better define actual ground conditions, such as drainage and slope, which are not considered in the table, but which may affect the engineering significance of the various terrain units.

TABLE 1:

SUMMARY OF ENGINEERING SIGNIFICANCE

RESOURCE POTENTIAL	BEDROCK	MORAINAL		GLACIOFLUVIAL		GLACIO-LACUSTRINE	ALLUVIAL	ORGANIC
		tMG/R	sgGO	sgGE	sgLB			
SAND & GRAVEL	Poor	Poor	Good	Good	Fair to Good	Fair to Poor	Poor	Poor
	Poor	Poor	Good	Fair to Poor	Fair to Good	Fair	Poor	Poor
	Blasting	Fair to Poor	Good	Fair to Good	Fair to Good	Poor	Poor	Poor
LIGHT CONSTRUCTION CONDITIONS	Excellent	Good	Good	Good	Fair to Good	Poor	Poor	Poor
	Difficult	Fair	Good	Good	Good	Fair	Poor	Poor
	Rockfill	Fair	Good	Good	Good	Fair	Poor	Poor
WASTE DISPOSAL SUITABILITY	Very Poor	Fair	Good	Fair to Poor	Good	Poor	Poor	Poor
	Poor	Fair to Poor	Fair to Poor	Poor	Fair to Poor	Poor	Poor	Poor
	Poor	Fair to Poor	Fair to Poor	Poor	Poor	Poor	Poor	Poor

## 5.0 REFERENCES

Boissonneau, A.N.

1965: Surficial Geology, Algoma, Sudbury, Timiskaming and Nipissing; Ontario Department of Lands and Forests, Map S465, scale 1:506 880 or 1 inch to 8 miles. Surficial geology 1962, 1963.

1968: Glacial History of Northeastern Ontario II. The Timiskaming-Algoma Area; Canadian Journal of Earth Sciences, Vol. 5, No. 1. p. 97-109.

Gartner, John F., Mollard, J.D., and Roed, M.A.

1980: Ontario Engineering Geology Terrain Study Users' Manual; Ontario Geological Survey, Open File Report 5288, 99 p.

Gartner Lee Associates Limited

1974: Aggregate Resources Search – North Shores of Lake Superior and Huron, Districts of Thunder Bay and Algoma; Ontario Division of Mines, Open File Report 5117, 116 p.

Giblin, P.E. and Leahy, E.J.

1967: Sault Ste. Marie-Elliot Lake Sheet, Algoma, Manitoulin, and Sudbury Districts; Ontario Department of Mines, Map 2108, Geological Compilation Series, scale 1:253 440 or 1 inch to 4 miles. Geological compilation 1964, 1965.

Nuffield, E.W.

1956: Geology of the Montreal River Area; Ontario Department of Mines, Vol. 64, Pt. 3 (1955), 32 p. Accompanied by Map 1955-1, scale 1:31 680 or 1 inch to ½ mile.

Prest, V.K.

1970: Quaternary Geology of Canada; p. 675-764 in Geology and Economic Minerals of Canada, edited by R.J.W. Douglas, Geological Survey of Canada, Economic Geology Report No. 1, 5th edition, 838 p.

Pye, E.G.



1969: Geology and Scenery, North Shore of Lake Superior; Ontario Department of Mines, Geological Guide Book No. 2, 148 p.

Springer, Janet

1977: Ontario Mineral Potential, Michipicoten Sheet, Districts of Algoma and Thunder Bay; Ontario Geological Survey, Preliminary Map P.1516, Mineral Deposits Series, scale 1:250 000. Compilation 1976, 1977.




Ontario Geological Survey  
 Map 5011  
 Northern Ontario Engineering  
 Geology Terrain Study  
 Data Base Map  
**BATCHAWANA**  
 NTS 41N/SE

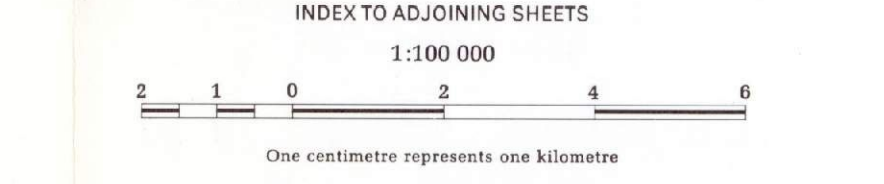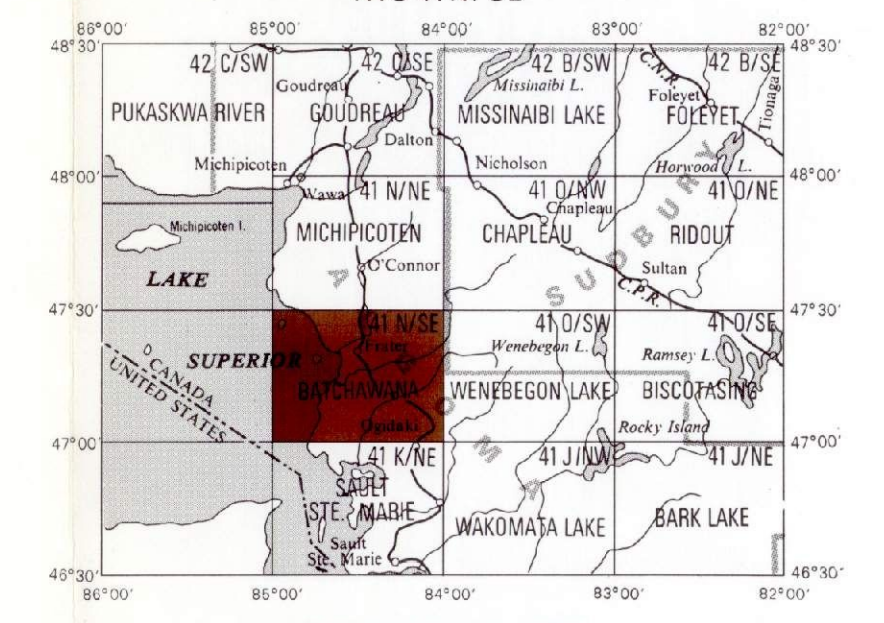

**ENGINEERING TERRAIN LEGEND**  
 The legend comprises four main components arranged as follows:

MATERIAL		LANDFORM	
TOPOGRAPHY	DRAINAGE	TOPOGRAPHY	DRAINAGE

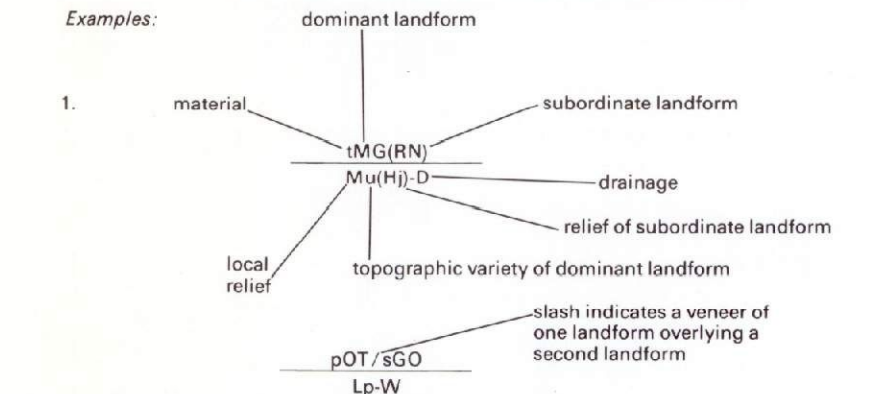

**LETTER SYMBOLS**  
 MATERIAL

- b boulders, bouldery
- c clay, clayey
- g gravel, gravilly
- p peat, muck
- r rubble
- s sand, sandy
- m silt, silty
- t till

**LANDFORMS**

- MORAINAL**
  - ME End moraine
  - MG Ground moraine
  - MH Hummocky moraine
- GLACIOFLUVIAL**
  - GD Ice contact delta, esker delta, kama delta, delta moraine
  - GE Esker, esker complex, crease filling
  - GK Kama, kama field, kame terrace, kame moraine
  - GO Outwash plain, valley train
- GLACIOLACUSTRINE**
  - LB Raised (abandoned) beach ridge
  - LD Glaciolacustrine delta
  - LP Glaciolacustrine plain
- ALLUVIAL**
  - AP Alluvial plain
- COLLUVIAL**
  - CS Slope failure
  - CT Talus pile
  - CW Slopewash and debris creep sheet; minor talus
- EOLIAN**
  - ED Sand dunes
- ORGANIC**
  - OT Organic terrain
- BEDROCK**
  - RL Bedrock plateau
  - RN Bedrock knob
  - RP Bedrock plan
  - RR Bedrock ridge
  - R/ Bedrock below a drift veneer

**TOPOGRAPHY**

- LOCAL RELIEF**
  - H Mainly high local relief
  - M Mainly moderate local relief
  - L Mainly low local relief
- VARIETY**
  - c channelled
  - d dissected, gullied
  - j jagged, rugged, cliffed
  - f cliffy volcanic rock signature
  - k kettled, pitted
  - n knobby, hummocky
  - p plain
  - r ridged
  - s sloping
  - t terraced
  - u undulating to rolling
  - w washed, reworked
- SURFACE CONDITION**
  - W Wet
  - D Dry
  - M Mixed wet and dry
  - h Suspected high water table

**GRAPHIC SYMBOLS**

- Major end moraine (symbol located over ridge crest if present)
- Well expressed drumlins and drumlinoid ridges
- All other linear ice-flow features
- Esker ridge (continuous, discontinuous; the symbol does not indicate direction of flow)
- Abandoned shoreline (continuous, discontinuous)
- Local dune area (type and location of individual dunes not indicated)
- Abandoned river channel, gateway, or ice marginal channels
- Escarpment
- Small landslide scar
- Sand or gravel pit
- Quarry or mine workings evident from airphotos or field observation (crossed picks are shown in the area of open excavation)
- Other man-made features (rock dumps, tailings, lagoons, landfills, etc.; type of feature mentioned where identifiable)
- Steep-walled valleys, often bedrock-controlled features (gateway, or ice marginal channels)
- Talus (defined, inferred; base of talus triangle indicates downslope side of escarpment)
- Line joining the same terrain units

**NOTE 1:**  
 This map is intended to be an inventory of regional engineering terrain conditions. Its purpose is to provide a guide for engineering and resource planning functions. The boundaries of the terrain units shown on the map are approximate only, consistent with a 1:100,000 scale. Site specific investigations are required in order to obtain detailed information for a particular area. The map user should refer to the accompanying report for a fuller description of terrain in the study area.

**NOTE 2:**  
 Colour is used to enhance what is considered to be the dominant engineering condition in simple, complex or layered terrain units.

**NOTE 3:**  
 Not all letter and graphic symbols shown in the legend necessarily appear on this map sheet.

Information from this publication may be quoted if appropriate credit is given.  
 Reference to this map is recommended as follows:  
 McQuay, D. F.  
 1979: Northern Ontario Engineering Geology Terrain Study Data Base Map, Batchawana.  
 Ontario Geological Survey, Map 5011, Scale 1:100,000

