

010

1996 OPAP SUBMISSION

OPAP FILE NUMBER OP96-229

TECK TOWNSHIP

LARDER LAKE MINING DIVISION

Thomas Obradovich
P. O. Box 1146
21 Goodfish Road
Kirkland Lake, Ontario
P2N 3M7

TABLE OF CONTENTS

Part 1:

Introduction.....1

Property Location Map.....2

Property, Location and Access.....3

Property Geology.....4

Target and Commodity.....5

Property History.....5

Deposit Type.....5

Description of Work.....6

Results, Conclusions and Recommendations.....6

Prospector License.....7

Figures

Figure 1: Plan of Part of 6150' Level Showing at Macassa

Figure 2: Regional Geology

Figure 3: Regional Geology

Figure 4: Map Showing Gold Camps and Propose Breaks

Part 2:

Diamond Drill Logs
Drill Section
Drill Plan
Drilling Invoice
Assay Certificate

42A01NE0289 2.17374 TECK

INTRODUCTION AND RATIONALE FOR THE PROJECT

The Kirkland Lake Main Break and 04 ore body east of the Amikougami Fault is well documented. The 1988 discovery of a parallel Au structure 1200' North known as the 05 has given new life to the camp. This discovery and subsequent exploration has brought more questions than answers to the explorationist: is the Narrows Break really the 05 to the East? is the North dipping 12N area Break really the Narrows Break or the 05 or even a completely new structure?

Although the Macassa Mine geologists can make an informed opinion the Layman can't. The layman has to sift through the information that can be found and come up with an idea.

Keep in mind that for almost 50 years everyone was wrong about the location of the Kirkland Lake Main Break West of the Amikougami.


The geology you find on the Teck map 1945-1 OGS was taken from the 1938 mapping by Gateway GML who spent years drilling away at what they thought was the Main Break and is still shown as such on the map. Queenston GML in 1983-1984 drilled the same ground. All of the drill holes fell short of the location of the Main Break. Each company drilled the ground, stripped the ground, and did geology on it. Finally, one hole drilled by Queenston went further North than the rest and this drill hole intersected the Main Break and the structure that had been the target for the past 50 years became known as the Hanging Wall Splay off the Main Break which is 200-300' North of where it was previously thought to be (see Fig. #3).

The applicant feels that a diamond drill hole off the North shore of Elsie Lake, although it would not intersect the South dipping Main Break, could possibly intersect the North dipping North Break of Nemscok and Parsons. This proposed drill hole could also intersect the 05 Break, that should be somewhere between the North and the Main Breaks, the dip of which is rumoured to be variable from vertical to North to South in places.

(Fig. #1) based on a Lac Macassa drawing shows the location of the 05 in relation to the 04 and shows evidence of a North dipping hanging wall and footwall shear to the North of the 05.

(Fig #2) based on a drawing by Queenston shows the projected North break with evidence to be seen in a railway cut on the West side of the Amikougami.

Also, shown in (Fig. #3) is the OGS 1945-1 fault bisecting Elsie Lake in the vicinity of the proposed drill hole and projected North dipping Break.

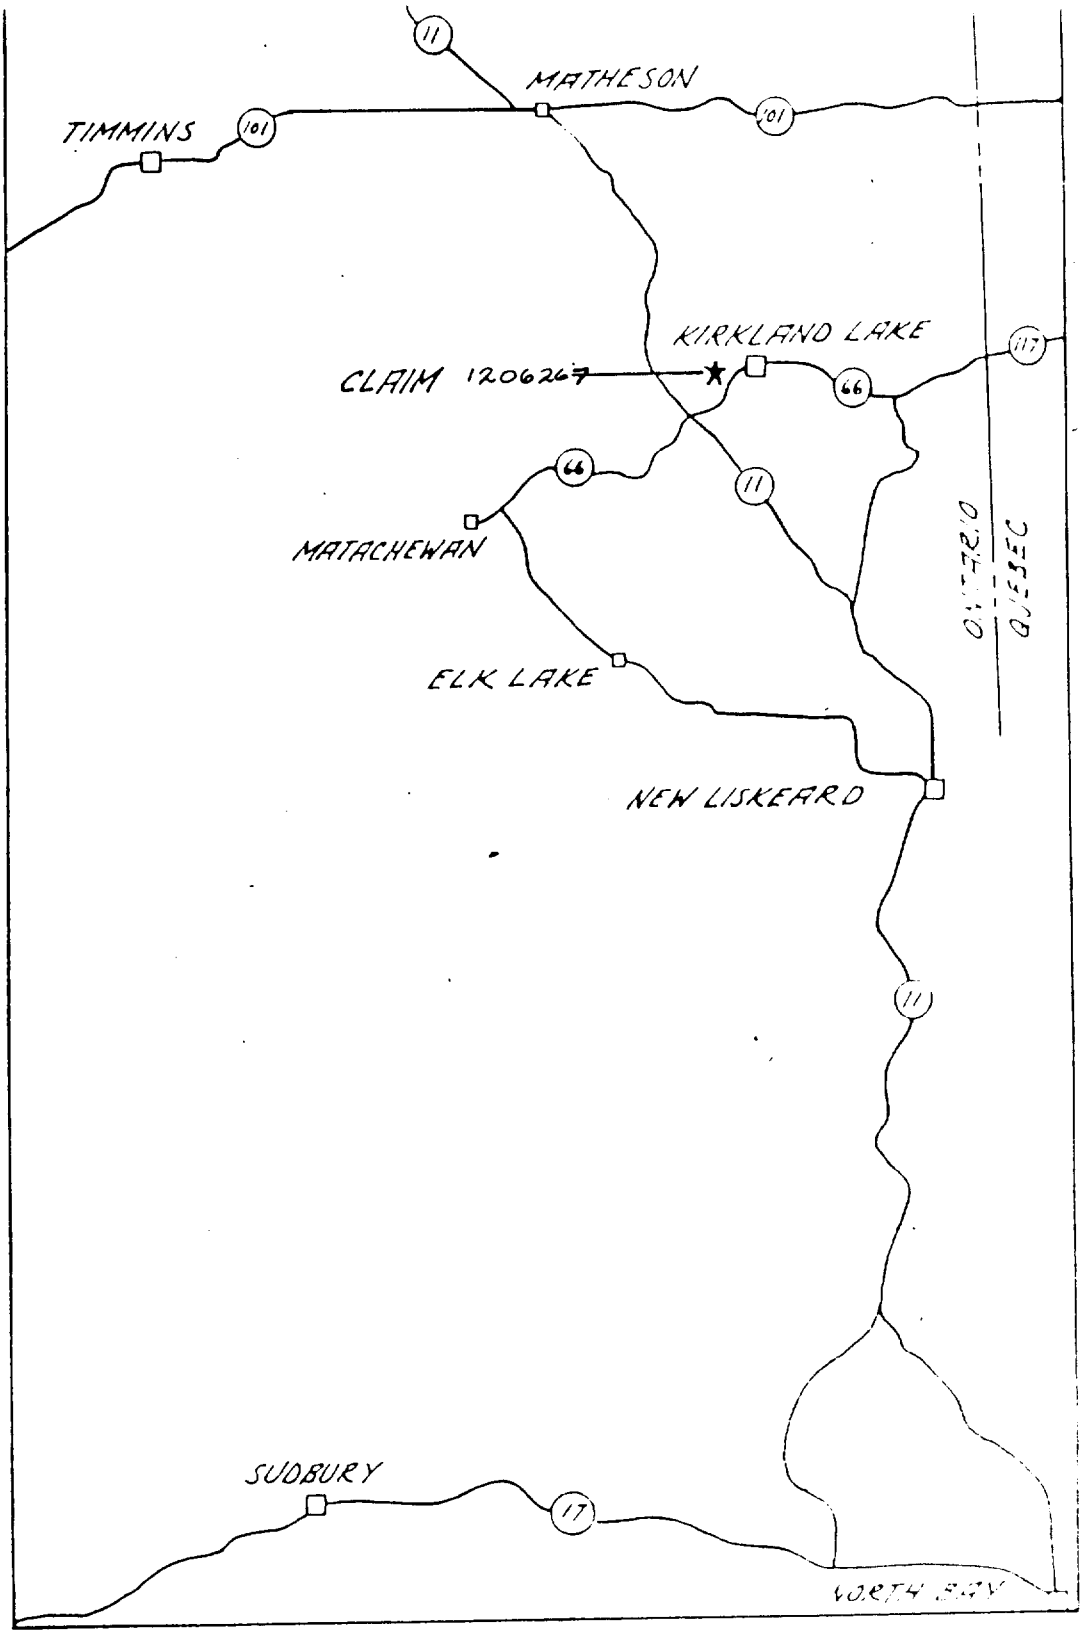

PROPERTY LOCATION MAP

CLAIM 1206267

TECK TWP

SCALE 1=20 MI MAY 91

PROPERTY LOCATION

The property is located on a 1 unit claim, L1206267, in the West central part of Teck Township in the Larder Lake Mining Division, claim map G3719, NTS 42/A/1 (80/05W 48/09W)

ACCESS

The Elsie Lake Property is easily accessible via a truck road from Swastika, the distance being one mile. Numerous trails and haulage roads lead around the North shore of the Lake. Although close to the town of Kirkland Lake, Elsie Lake remains remote and is not used for recreational purposes.

PROPERTY GEOLOGY

The rock formations on the property consist of a variety of sediments, tuffs and intrusives. The sedimentary units and the long axis of all the intrusive bodies strike 060-80E and dip steeply to the South.

The Timiskaming age sediments are composed of pebble conglomerates, greywackes and finer interbedded wackes. Adjacent to and interlayered with these sediments are varied pyroclastic/lithic and volcanic ash tuffs.

Augite or basic syenite is the oldest and most wide spread of the intrusive types. Both the basic and felsic syenites are intruded by syenite porphyry. The porphyry unit exhibits sharply defined intrusive contacts while conforming fairly closely to the strike and dip of the regional formations. This composite stock dips steeply to the South and widens with depth.

TARGET AND COMMODITY

The applicant has completed linecutting and a Mag and VLF Survey this past winter and has done further research. It is felt that a structure, possibly Au bearing, could be found beneath Elsie Lake. The target would be to prove the existence of the N-S OGS fault (Fig. #3) and the projected North dipping Break (Figs. # 1 & 2)

PREVIOUS WORK

No history of work was found on researching this property (see attached Resident Geologist's assessment file overlays).

DEPOSIT TYPE

1) Au deposition in the intrusive sequence and possibly into the immediate surrounding Timiskaming units (ie. Gateway DDH's #1 & 2, Fig. #3) via fractures or planes of weakness

2) Thrust and strike faulting and fracturing and possible further Au remobilization and deposition via the faults into new subsidiary auriferous zones

DESCRIPTION OF WORK

In September, 1996 the applicant supervised the drilling of diamond drill hole Teck 96-1 which was drilled to prove the existence of the N-S fault and the projected North dipping Break (see Target and Commodity Section). The hole was spotted on the north shore of Elsie Lake by Barry McCombe under supervision of applicant. Drilling was performed by Forages M. LaFreniere Inc. The drill hole was logged by Todd Keast with Darrin Porritt splitting the core for any samples Todd requested to be sampled. Samples were sent to Swastika Laboratories and were assayed for Gold.

RESULTS AND CONCLUSIONS

One diamond drill was completed on the north shore of Elsie Lake. It was drilled at a 45 degree angle 110 meters east and 280 meters south of the number 4 post of mining claim L1206267. The hole went to a depth of 600 feet. This drill hole did not intersect the north dipping North Break nor the 05 Break that was thought to be somewhere between the North and the Main Breaks. The drill hole stayed in the sediments and did not encounter any fault or break-like formations.

The only section sampled in the drill hole was from 18 feet to 33 feet at the beginning of the hole. All samples were assayed for gold. All assays were nil except the first three feet which yielded 2 ppb of gold.


Obviously, no claims were staked in the area since the target formations were not detected. Also no option agreement resulted from this program.

RECOMMENDATIONS

Since the structures targeted by this program are completely covered by water (Elsie Lake) it is recommended that further drilling be done in the winter time after freeze-up on Elsie Lake itself.

Ministry of Northern Development and Mines
Ontario

Ministère du Développement du Nord et des Mines

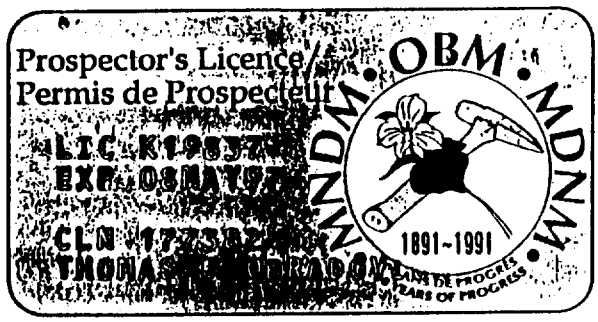

40 W

30 W

20 W

10 W


FIGURE 10

LAC MINERALS LTD(MACASSA DIV.)

GEOLOGY DEPT.

PLAN OF PART OF 6150' LEVEL SHOWING
MAIN STRUCTURES AND ASSOCIATED LITHOLOGIES

0 100 200 300 400FT

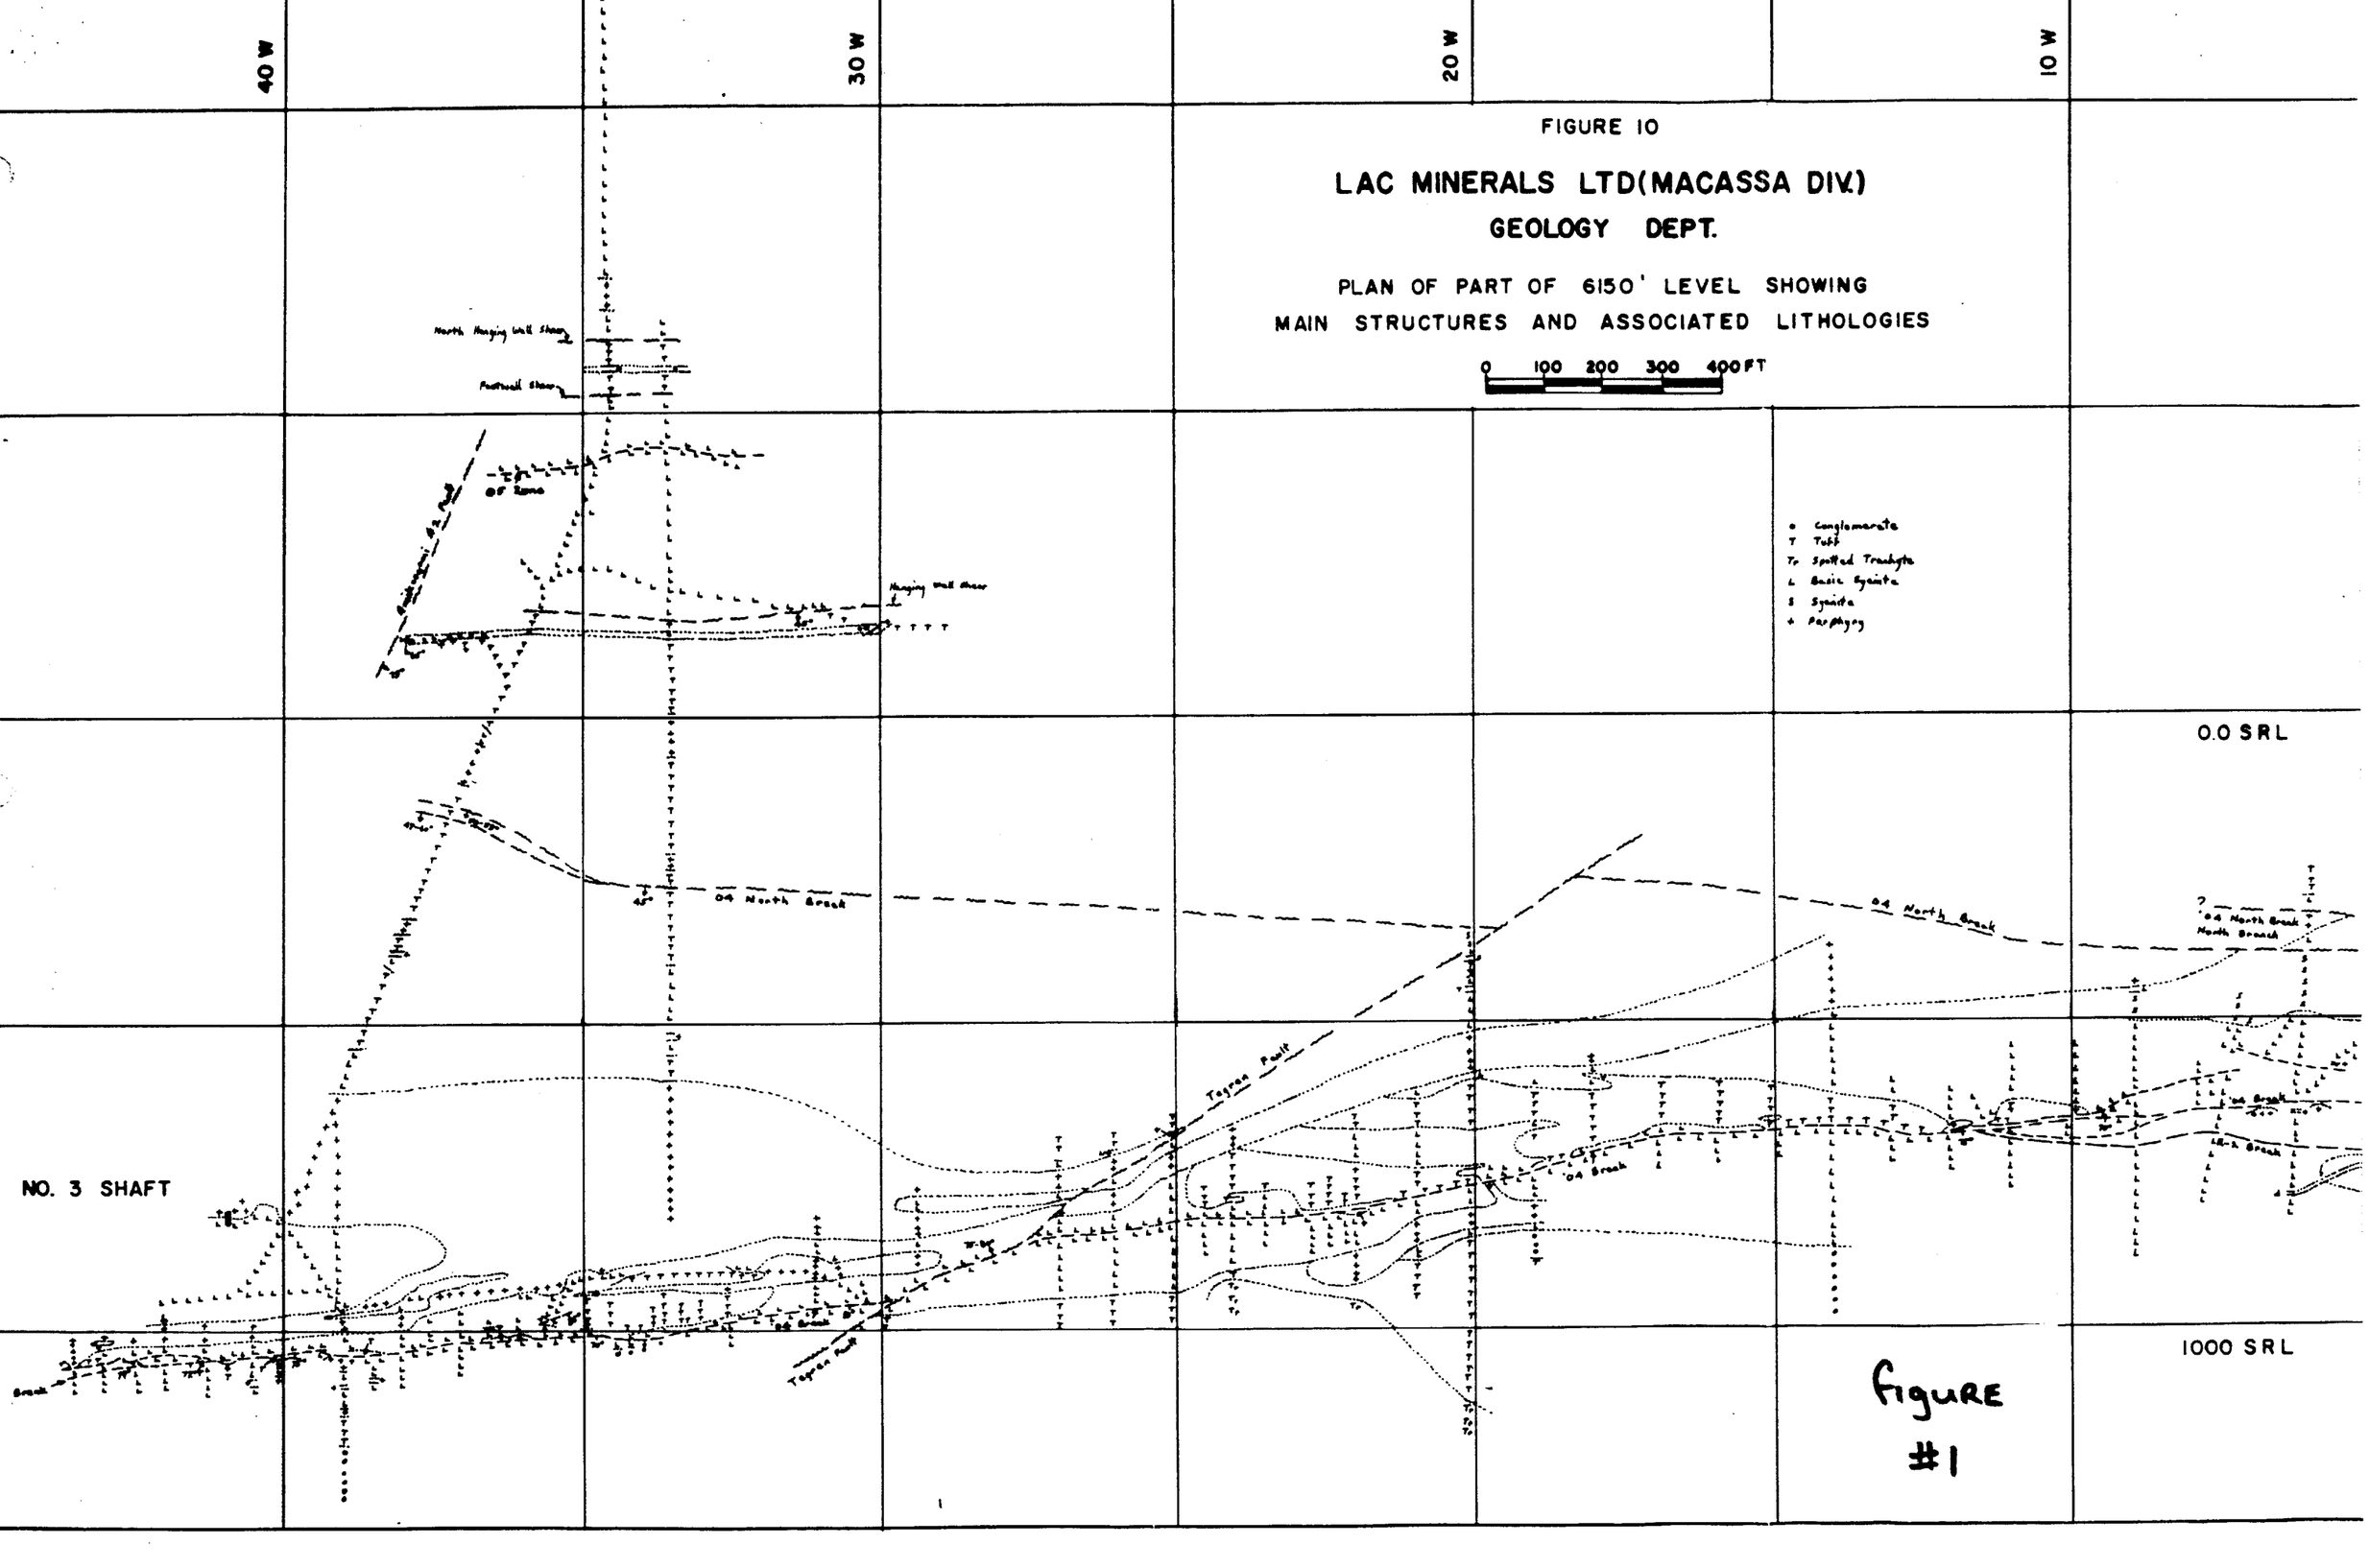

- c Conglomerate
- T Tuff
- Tr Spotted Trachyte
- L Basic Syenite
- S Syenite
- P Porphyry

0.0 SRL

1000 SRL

Figure #1

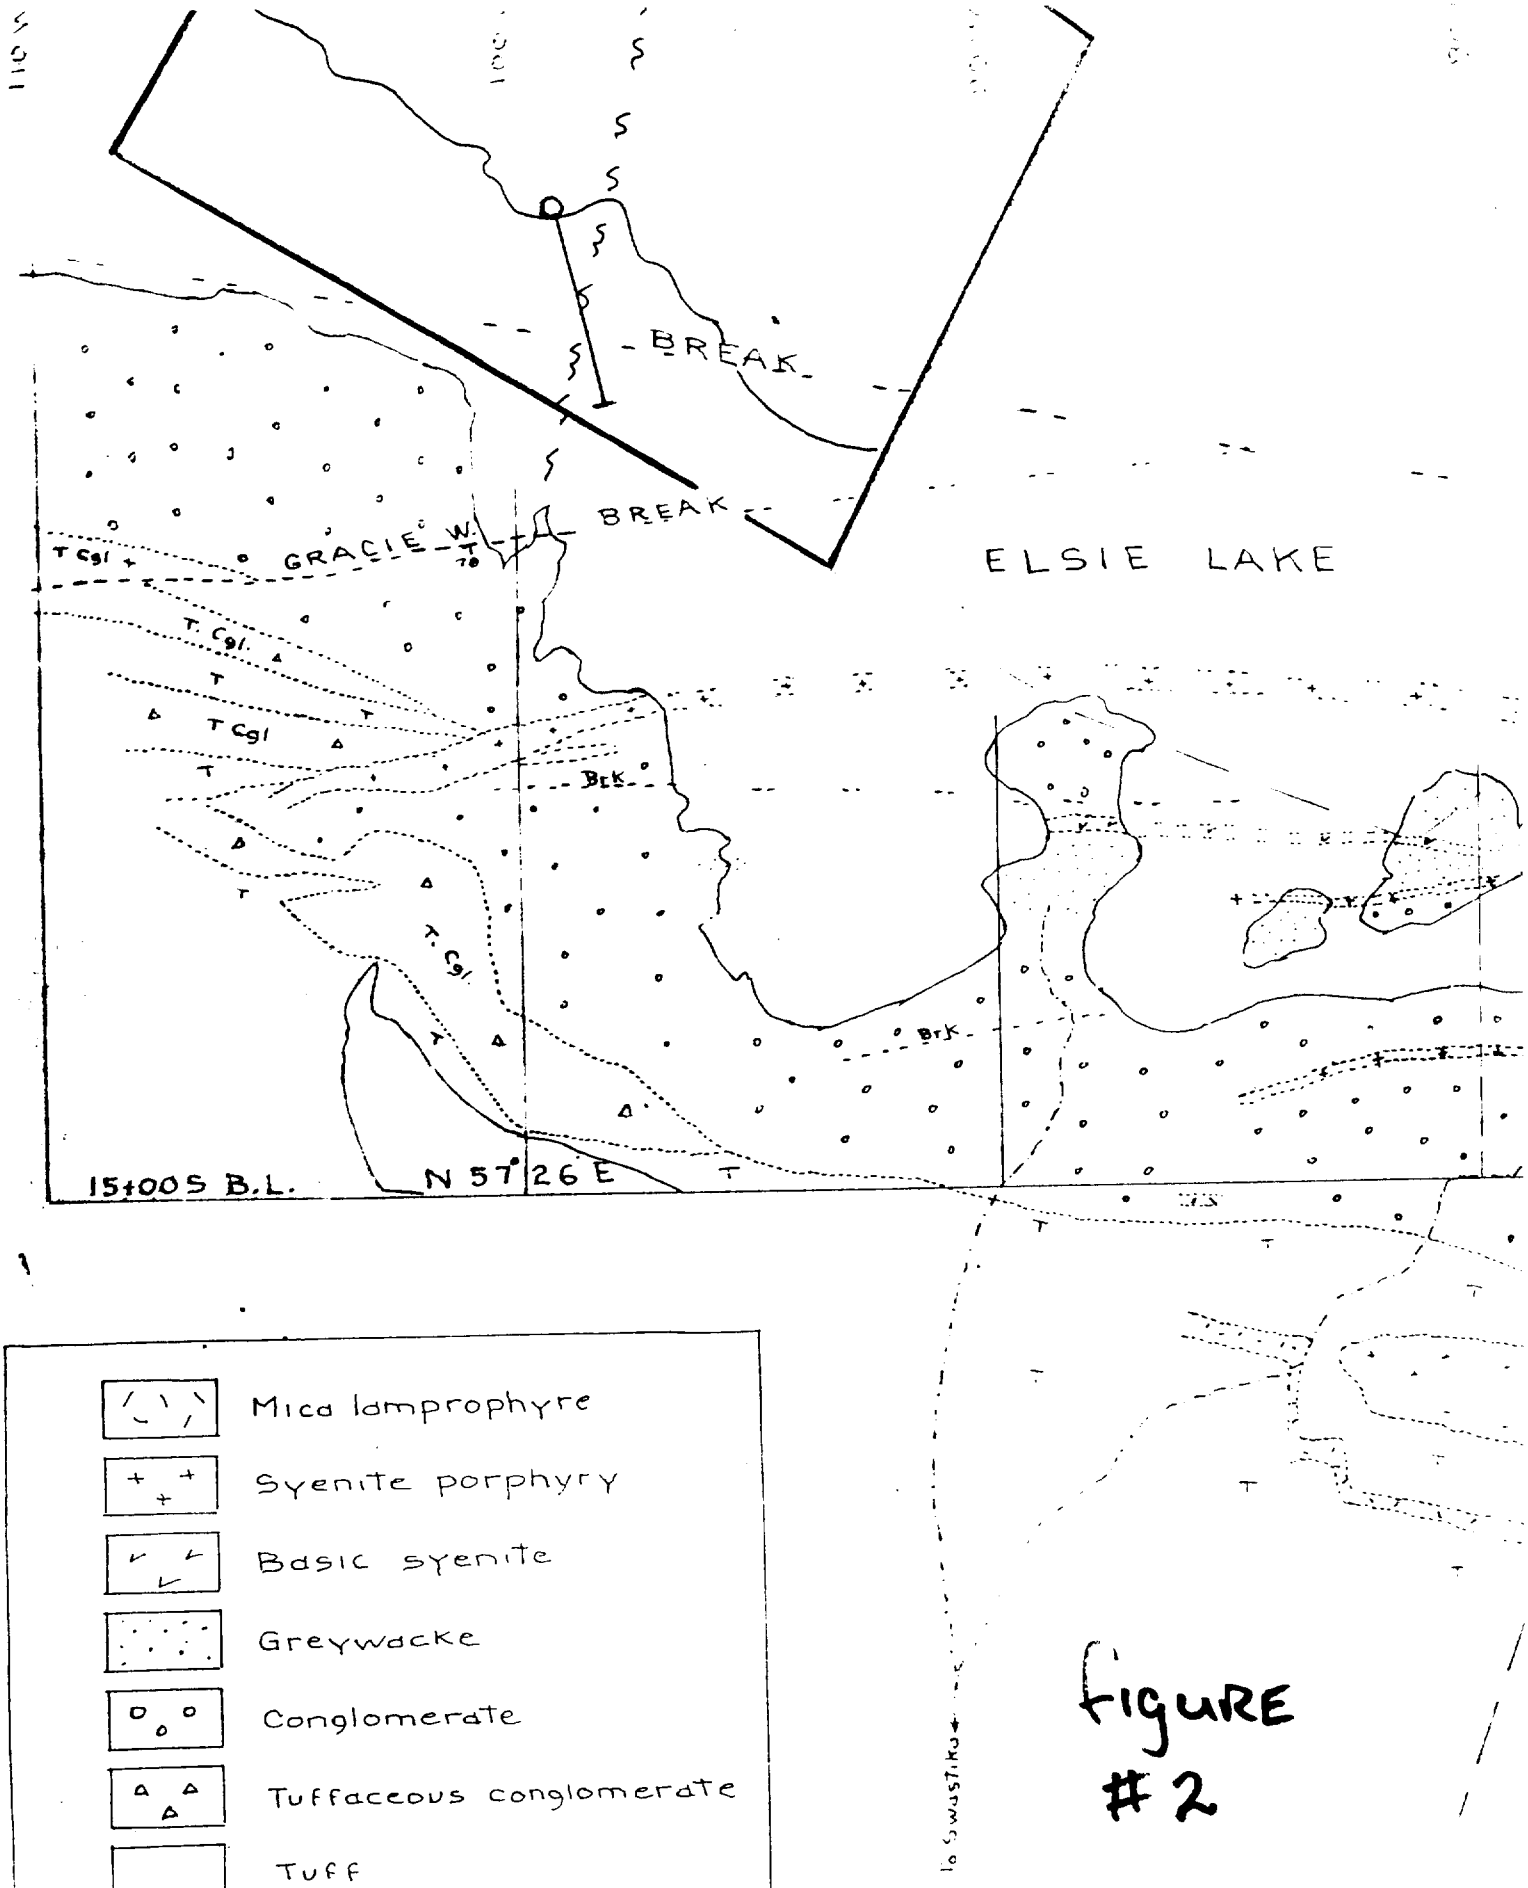

BREAK
BREAK
GRACIE
ELSIE LAKE
T Cgl
T. Cgl.
T Cgl
BrK
λ Cgl
BrK
15+00S B.L.
N 57 26 E
Mica lamprophyre
Syenite porphyry
Basic syenite
Greywacke
Conglomerate
Tuffaceous conglomerate
Tuff
Breaks

FIGURE #2

A5- BASIC SYENITE LAMPROPHYRE

T2 GWKE, CONGL.

1296267

531983

7216

7711

2930

2935

2942

2941

H.R.548

H.R.547

TEGRENE

Elsie Lake

PROJECTED (NORTH BREAK?)

MAIN BREAK LOCATED 1984

H.S.1166 POLLOCK CLAIM

6822

5049

#420' / 35° Az

GRACIE BREAK

GATEWAY #1

GATEWAY #2

GATEWAY #3

GATEWAY #4

GATEWAY #16

GATEWAY #17

T.16513

T.16514

T.16515

T.16510

T.16509

T.16546

T.16508

1385

1224

KIRKLAND GATEWAY

ST. JOSEPH

Figure #3

Figure 3

SCALE 1" = 400 ft


GRACIE WEST BREAK
DIP 78°S
McIVOR SHAFT
DAWSON PIT
STRIKE N65°E
DIP VERTICAL
23N. AREA
STRIKE N70°E
DIP 70°-80°South
NARROWS BREAK
NEMCSOK & PAASONS
1980 stripping
DIP 65° NORTH
STRIKE 50-75°E
BAZ ZONE at 8000' LEVEL
29 BREAK ZONE at 3000'
NARROWS BREAK 3000'
MAIN BREAK SURFACE
Lois Lake
Elgin Lake
KIRKLAND BASIN
KIRKLAND LAKE GOLD
LAKE SHORE
KIRKLAND TOWNSITE
KIRKLAND-HUDSON BAY
COMFORT KIRKLAND
KIRKLAND GOLD RAND
McIVOR
TEGREN
SHAFT
KIRKLAND-GATEWAY
ST. JOSEPH KIRKLAND
KIRKLAND GATEWAY
SAHTRAM
VENTURA KIRKLAND
AMALGAMATED KIRKLAND
FLORENA
TECK-HUGHES
WRIGHT-HARGREAVES
VINDICATOR
Slimes

Figure 2



ONTARIO PROSPECTORS ASSISTANCE PROGRAM (OPAP)
FINAL SUBMISSION FORM 1995

INSTRUCTIONS: Please read the guidebook before completing form Please type or print
Submit completed form and supporting documentation
by January 31, 1996 (May 31, 1996 for winter program) to:
Incentives Office (Mining and Land Management Branch)
Ministry of Northern Development & Mines
5th Floor, 933 Ramsey Lake Rd., Sudbury, Ontario P3E 6B5

TO BE COMPLETED BY SUCCESSFUL GRANTEES AFTER PROJECT COMPLETION AND ACCOMPANIED BY WRITTEN REPORTS, MAPS, ETC.

Regular Project ☑ Winter Project ☐

Applicant Thomas Obradovich File Number OP96-229

Proposed project area(s) (Twp. or claim map name, latitude and longitude) Completed?

1. Teck Twp. 80105W 48/09N (Larder Lake) Yes ☑ No ☐
2. West central part of township, claim L1206267 Yes ☐ No ☐
NTS (A/1)

Changes to proposed project(s) (if any)
- none - used contractors for core logging, spotting drillhole, and core splitting and sampling.

List other co-owners of the property with OPAP grants that worked on project
- none

I. WORK PERFORMED BY APPLICANT (Summary of Section IV)

No. days worked by applicant (that's only you)

1. Project #1 area/name Teck Project

Traditional prospecting	No. of samples		
Geological surveys	Scale		
Geophysical surveys	Type	Miles/km	
Geochemical surveys	Type	No. of samples	
Drilling	Type NQ-Diamond Drilling	Ft./m 600 feet	5 days
Stripping/Trenching	Method		
Other	Type		
		TOTAL	5 days

Form filled out by ☑ Applicant ☐ Other (please specify)
Report prepared by ☑ Applicant ☐ Other (please specify)
Technical Report Filed for Assessment Work Yes ☑ No ☐

I. WORK PERFORMED BY APPLICANT (Continued)

2. Project #2 area/name _____

			No. days worked by applicant
Traditional prospecting	No. of samples _____		_____
Geological surveys	Scale _____		_____
Geophysical surveys	Type _____	Miles/km _____	_____
Geochemical surveys	Type _____	No. of samples _____	_____
Drilling	Type _____	Ft./m _____	_____
Stripping/Trenching	Method _____	_____	
Other	Type _____		_____
		TOTAL	_____

TOTAL DAYS (ALL PROJECTS) A. _____
(Attach additional sheets for additional project areas as required)

II. EXPENDITURES (total of all projects) - Summary of I and III

1. Number of working days by applicant (A) x $100/day ..... 4 days Supervision ..... $ 400.00
2. Number of report preparation days by applicant x $100/day ..... 1 day ..... $ 100.00
3. Analyses/Assay costs ..... 5 gold samples ..... $ 55.00
4. Equipment rentals/
   ..... $ _____
   ..... $ _____ $ _____
5. Consumable Supplies ..... _____ $ _____
6. Contract services (state type)
   2 # of workers Diamond drilling 600' ..... $ 10,111.50
   2 # of days worked Splitting Core Spotting hole, Retrieving Core $ 300.00 $ 10911.50
   2 days logging Core ..... $ 500.00
7. Travel (state method: road, air, etc.)
   Vehicle ~~car~~ : Spotting hole ..... $ _____
   retrieving Core ..... $ _____ $ 30.00
   ..... $ _____
8. Food and Accommodation ..... assumed by applicant ..... $ —
9. Other expenses (specify, e.g. typing, printing, shipping of supplies)
   typing, Copying ..... $ 100.00 $ 100.00
   ..... $ _____ $ _____
10. Helpers ..... $ _____ $ _____
    # of helpers .....
    # of days worked .....

TOTAL EXPENDITURES ..... $ 11,596.50

III. DETAILED LIST OF EXPENDITURES (Summarize in Section II)

Date	Recipient of Payment	Explanation	Amount
Sept 14/96	Barry McCombe	flagged road to drill, spotted hole	$150.00
Sept 15/96	" "	assisted drillers to " "	—
Sept 16/96	Forages M. Lafrenaire Inc	diamond drilling	10,111.50
Sept 17/96	"	" "	—
Sept 18/96	"	" "	—
Sept 19/96	"	" "	—
Sept 24/25 96	Todd Keast	logged core	500.00
Sept 17 to 25 96	Barry McCombe	- retrieved core, split core	150.00
Sept 13 to Sept 26/96	Tom Obradovich	- project supervision	400.00
Jun 17, 18/97	Lynn Marinich/Larry Stoliker	typing, photocopying	100.00
Oct 28/96	Swastika Laboratories	assays	55.00
Jan 16	Tom Obradovich	Report preparation	120.00

Mileage rate claimed 100 km at 30¢/km for use of own vehicle 30.00

TOTAL 11596.50

Attach additional sheets as required.

IV. DAILY REPORTS (Summarize work activity in Section I)

Day	Project Area	Date	Work Performed
1	Sept 14 Teck Project	Sept 14/96	flagged road to hole; spotted hole walked drill to site.
2	"	Sept 15/96	Diamond Drilling
3	"	Sept 16/96	" "
4	"	17	" "
5	"	18	" "
6	"	19	" "
7	"	Sept 24	Logged core
8	"	25	" core.
9	"	Jan 16	- prepared report
10	"	Jan 17	- typed logs, and report,
11	"	" 18	photocopied report.
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			

Attach additional sheets as required.

V. SIGNIFICANT RESULTS (please complete)

Project Area	New Showings and/or Anomalies	Commodity	Best Analyses
Teck Project	NONE	Au	2 ppb

VI. CLAIMS STAKED DURING/AFTER PROSPECTING ACTIVITY (please complete)

Project Area	Claim Numbers	Number of Claim Units
Teck Project	NONE	

VII. OPTION AGREEMENTS RESULTING FROM OPAP PROJECT (please complete)

Optionee	Property/Claims	Dollar Value of Work Commitment
NONE		

The Ministry of Northern Development and Mines may verify all statements related to and made herein this application.


1. I am the person named in the Final Submission Form under the Ontario Prospectors Assistance Program.
2. I am ordinarily a resident of Canada.
3. I have complied with all the requirements of the said program.
4. I understand that it is an offence under the Ontario Mineral Exploration Act, R.S.O. 1990, to make a false or misleading statement and that all statements and all other information submitted in support of the said application are true and correct.
5. I was not employed by the Mines and Minerals Division of the Ministry while in receipt of the OPAP grant.
6. I am aware that any other Provincial or Federal Government financial assistance received for said application will be deducted from the amount of incurred "Total Eligible Expenses".

It is an Offence under subsection 8(1)(A) of the Ontario Mineral Exploration Act, R.S.O. 1990 to knowingly furnish false or misleading information.


Personal information on this form is obtained under the authority of the Ontario Mineral Exploration Act, R.S.O. 1990, sections 2, 3 and 4 and the Ontario Prospectors Assistance Program Regulation, sections 4, 5 and 6. The financial and technical information will be used for the purpose of determining the eligibility of the applicant to have a program designated for financial assistance and the amount of such assistance. Other information, such as statistical information about the individual projects will be used for the purpose of determining the overall effectiveness of the program. It may be disclosed for those purposes and I consent to its disclosure for such purposes. Questions about this collection should be directed to Supervisor, Incentives Office, Mining and Land Management Branch, Ministry of Northern Development and Mines, 5th Floor, 933 Ramsey Lake Road, Sudbury, Ontario P3E 6B5, Toll free 1-800-265-0834.

Signature of Applicant _____ Date _____

Name (print) _____

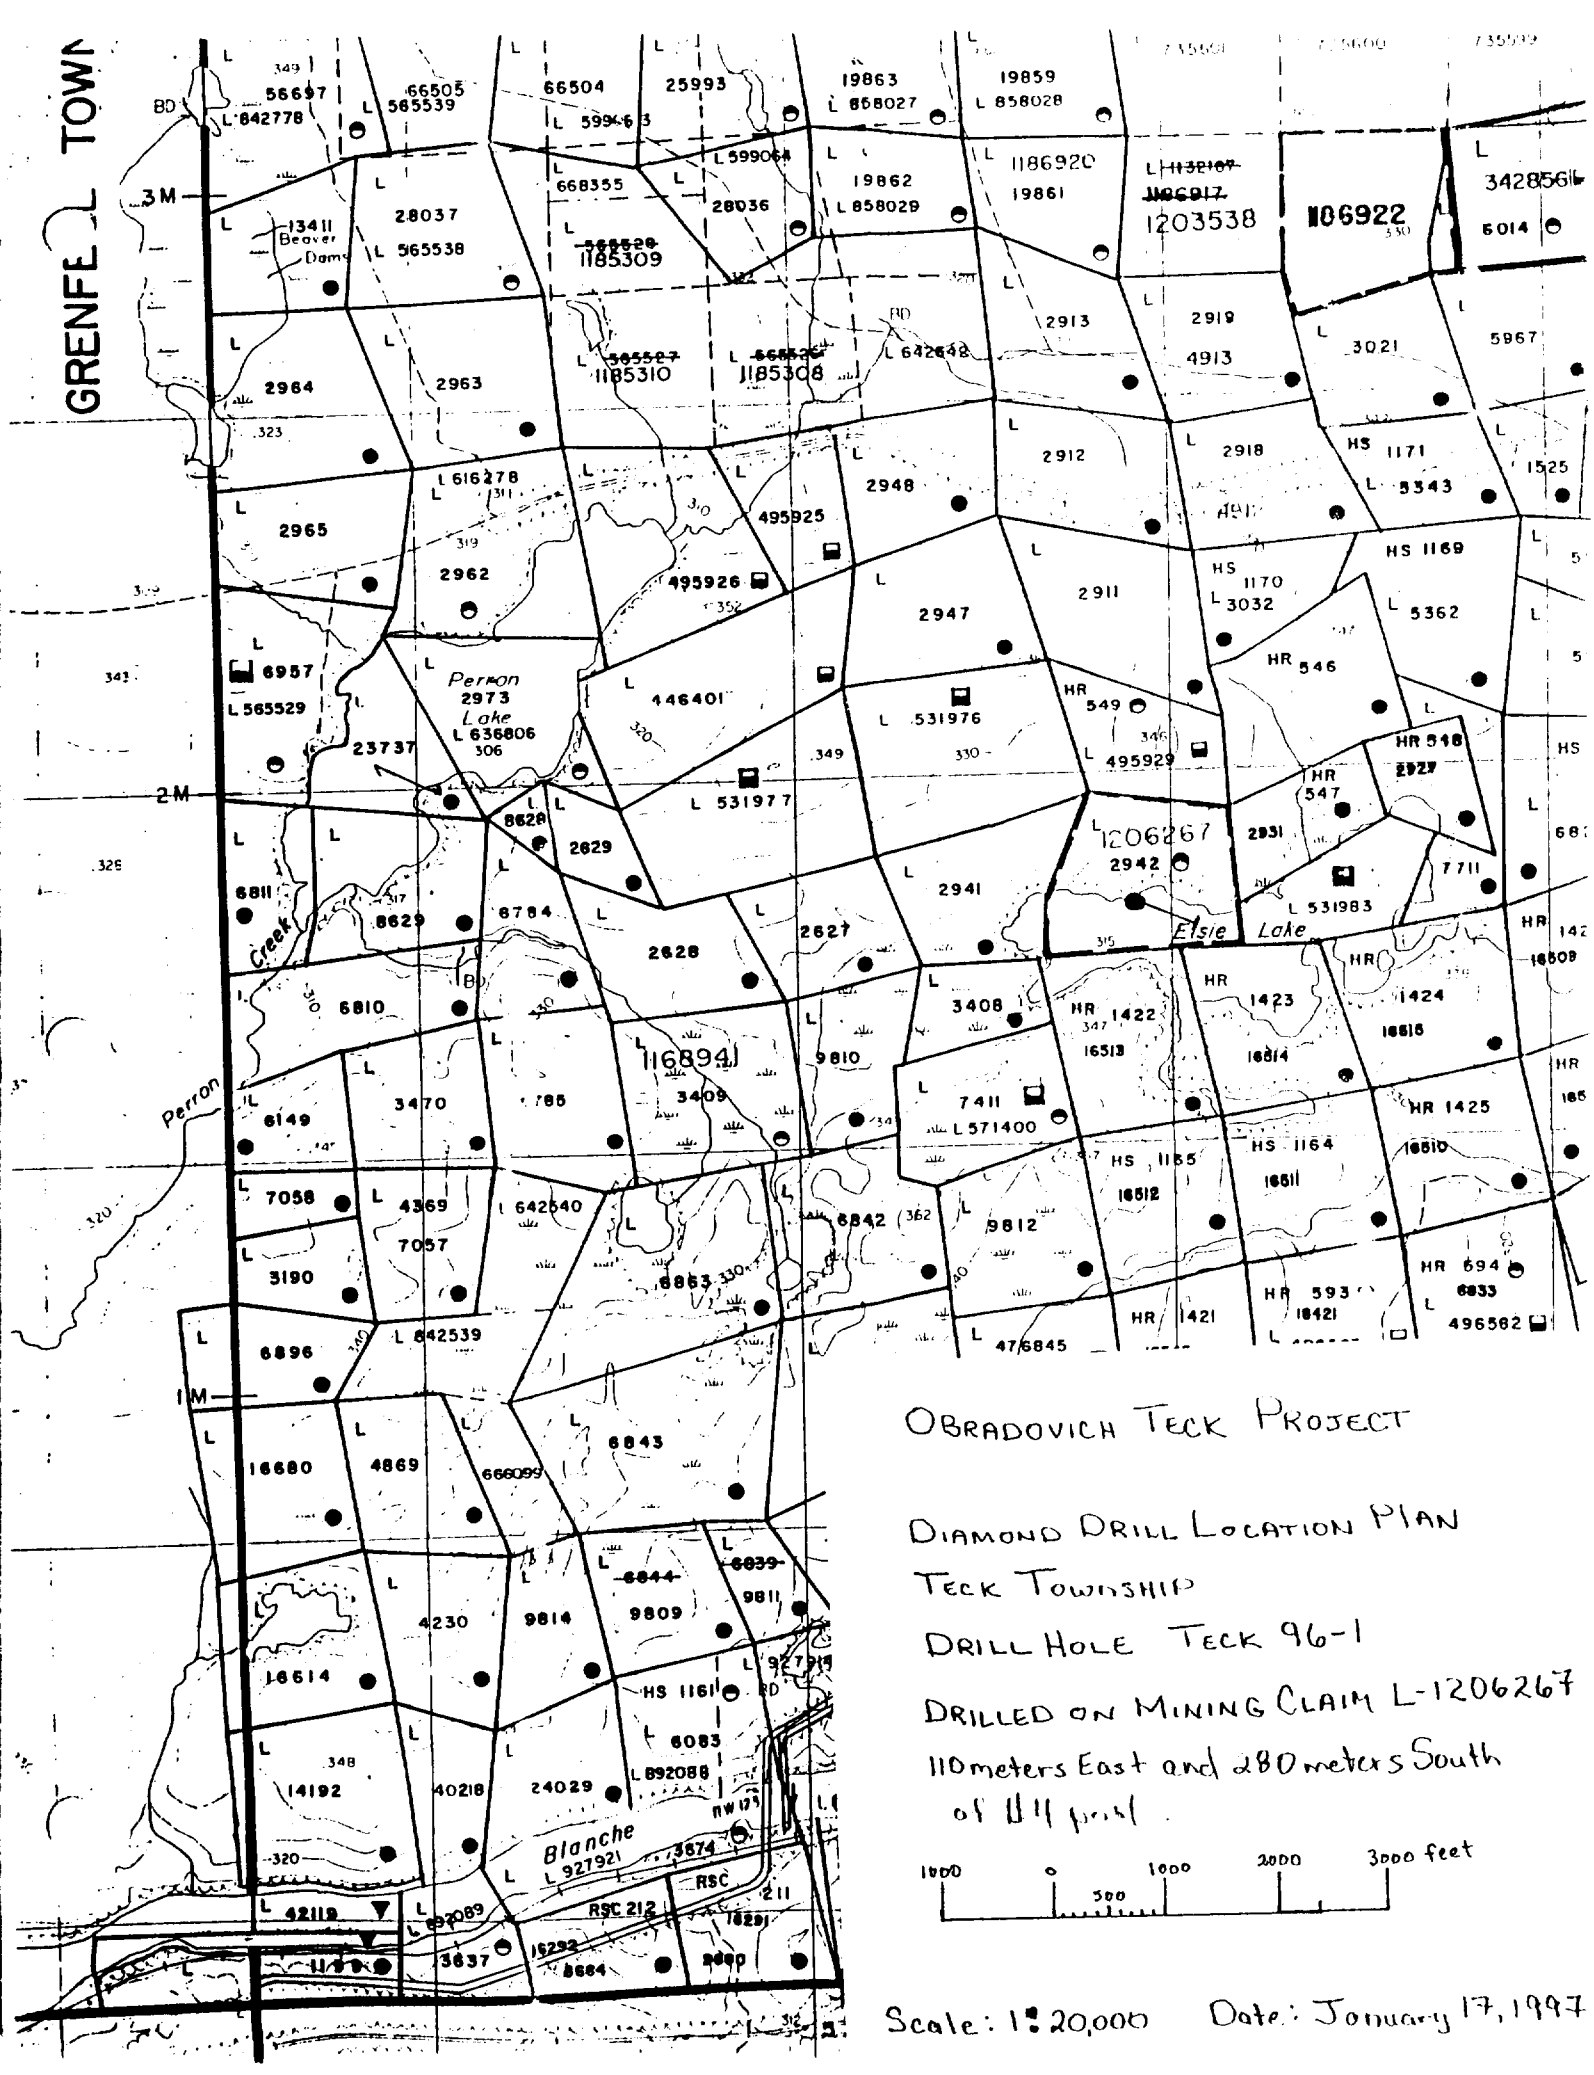
GRENFE L TOWN
3M
2M
1M
Perron Lake
Perron Creek
Elsie Lake
Blanche
1185309
1185310
1185308
1203538
1206267
1186920
1186894
OBRADOVICH TECK PROJECT
DIAMOND DRILL LOCATION PLAN
TECK TOWNSHIP
DRILL HOLE TECK 96-1
DRILLED ON MINING CLAIM L-1206267
110 meters East and 280 meters South
of UL post.
1000 0 1000 2000 3000 feet
500
Scale: 1:20,000
Date: January 17, 1997

Collar Location Teck 96-1
S 50° E

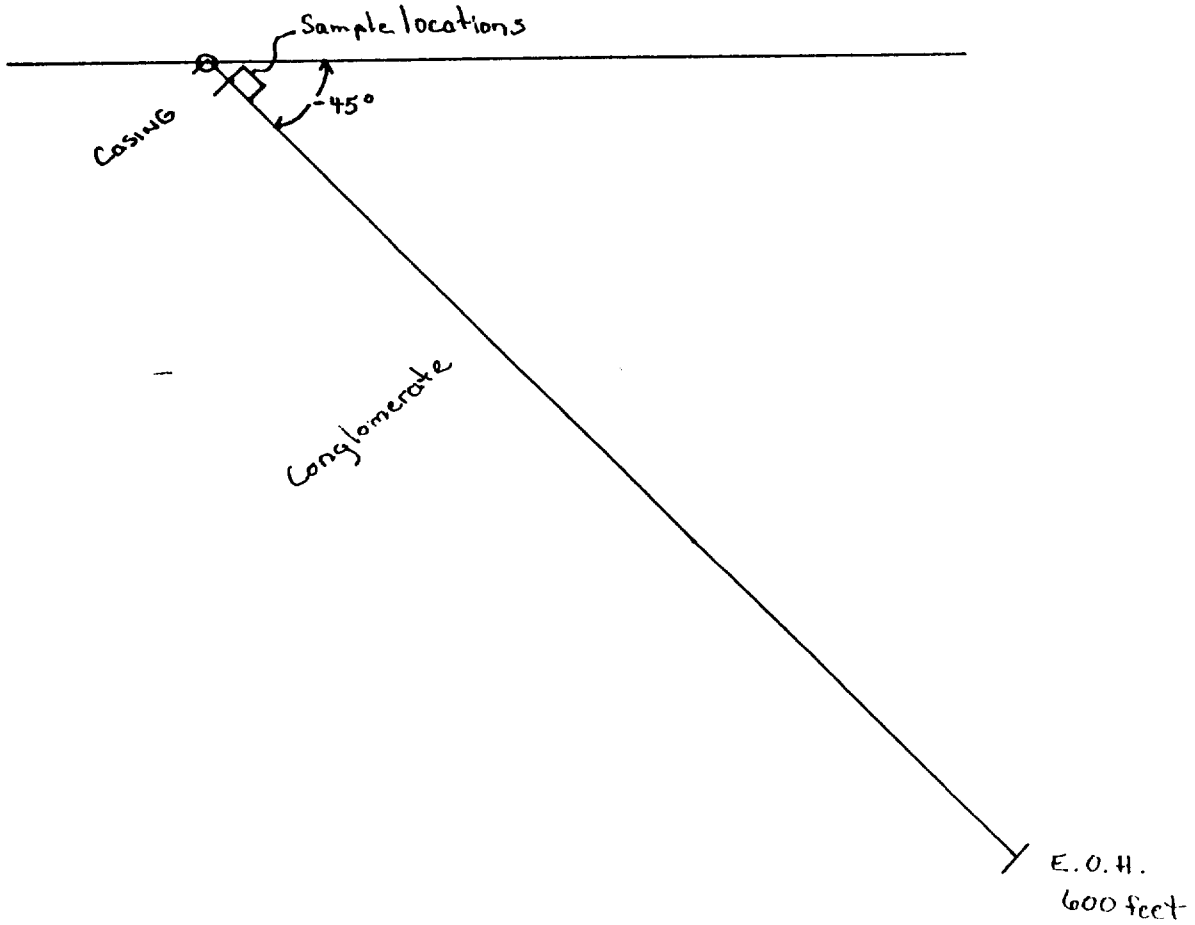



ASSAY RESULTS

No.	Footage From	Footage To	Length (feet)	Au ppb
1	18	21	3	2
2	21	24	3	Nil
3	24	27	3	Nil
4	27	30	3	Nil
5	30	33	3	Nil

OBRADOVICH TECK PROJECT

DIAMOND DRILL SECTION
TECK TOWNSHIP
DIAMOND DRILL HOLE TECK 96-1
DRILLED ON MINING CLAIM L-1206267
110 meters East and 280 meters South
of #4 Post

Scale: 1" = 100 feet DRAWN: Jan. 17, 1997

Swastika Laboratories

A Division of TSL/Assayers Inc.

Established 1928

Assaying - Consulting - Representation

Geochemical Analysis Certificate

6W-4470-RG1

Company: **T. OBRADOVICH**
Project: Teck
Attn: T. Obradovich

Date: NOV-04-96

We hereby certify the following Geochemical Analysis of 5 Split Core samples submitted OCT-28-96 by .

Sample Number	Au PPB	Au Check PPB
1	2	Nil
2	Nil	-
3	Nil	-
4	Nil	-
5	Nil	Nil

One assay ton portion used.

Certified by _____

P.O. Box 10, Swastika, Ontario P0K 1T0
Telephone (705) 642-3244 FAX (705) 642-3300

2.17374

| | | |

HOLE NO. TECK 96-1 | Pg 2

DRILLING COMPANY: Lafreniere Drilling	COLLAR ELEVATION:	BEARING OF HOLE FROM TRUE NORTH: 550°E	TOTAL: 600'	DIP OF HOLE AT: -45° COLLAR		LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM: 110 m. East 280 m. South #4 Post Claim 1206267
DATE HOLE STARTED: Sept.16/96	DATE COMPLETED: Sept.19/96	DATE LOGGED: Sept.25/96	LOGGED BY: Todd Keast	(M)		
EXPLORATION CO. OWNER OR OPTIONEE: Tom Obradovich		DATE SUBMITTED: Sept.28/96	SUBMITTED BY SIGNATURE	(M)		
				(M)		
				(N)		

MAP REFERENCE NO.:

CLAIM NO.: 1206267

LOCATION (Tp., Lot, Con. OR Lot. and Long.): Teck Township

PROPERTY NAME: Teck Claim 1206267

FOOTAGE (M) FROM	TO	ROCK TYPE	DESCRIPTION Colour, grain size, texture, minerals, alteration, etc.	NO.	SAMPLE FOOTAGE FROM (M)	TO	SAMPLE (M) LENGTH	Au ppb	Pd ppb	ASSAYS + ppm Cu	Zn	Ag	Co	Ni
			gradational grain size increase of matrix downhole											
			360 - 367 10-15% 5 cm. clasts											
			482 - 490 10-15% 5 cm. clasts											
			E.O.H.											

Ontario Ministry of Northern Development and Mines

Declaration of Assessment Work Performed on Mining Land

Mining Act, Subsection 65(2) and 66(3), R.S.O. 1990

Transaction Number (office use)
W7780.00591
Assessment Files Research Imaging

TECK: ELSIE LAKE

Personal informati
Mining Act, the inf
Questions about
933 Ramsey Lake



900

and 66(3) of the Mining Act. Under section 8 of the
nt work and correspond with the mining land holder.
of Northern Development and Mines, 6th Floor,

Instructions: - For work performed on Crown Lands before **recording** a claim, use form 0240.
- Please type or print in ink.

1. Recorded holder(s) (Attach a list if necessary)

2.17374

Name	Client Number
Tom Obradovich / 297 3090 Canada Inc	177382 / 300337
Address	Telephone Number
P.O. Box 1146	(705) 567-6883
Kirkland Lake, Ont P2N 3M7	Fax Number (705) 567-6873
Name	Client Number
L.M. Dyment / J. Kidston	128504 / 151995
Address	Telephone Number
P.O. Box 66	642-3060
Swastika, Ontario P0K 1T0	Fax Number

2. Type of work performed: Check (✓) and report on only ONE of the following groups for this declaration.

☐ Geotechnical: prospecting, surveys, assays and work under section 18 (regs)
☑ Physical: drilling, stripping, trenching and associated assays
☐ Rehabilitation

Work Type	Office Use
Diamond Drilling	Commodity
	Total $ Value of Work Claimed $12,397
Dates Work Performed From 15 Day 09 Month 96 Year To 26 Day 09 Month 96 Year	NTS Reference
Global Positioning System Data (if available) Township/Area Teck	Mining Division Larder L. Re.
M or G-Plan Number	Resident Geologist District K. Lake.

Please remember to: - obtain a work permit from the Ministry of Natural Resources as required;
- provide proper notice to surface rights holders before starting work;
- complete and attach a Statement of Costs, form 0212;
- provide a map showing contiguous mining lands that are linked for assigning work;
- include two copies of your technical report.

3. Person or companies who prepared the technical report (Attach a list if necessary)

Name	Telephone Number
Todd Keast	(705) 567-6883
Address	Fax Number
P.O. Box 1146, Kirkland Lake, Ont P2N3M7	(705) 567-6873
Name	Telephone Number
Address	Fax Number
Name	Telephone Number
Address	Fax Number

RECEIVED
JUN 05 1997
MINING LANDS BRANCH

4. Certification by Recorded Holder or Agent

I, Larry J. Stoliker (Print Name), do hereby certify that I have personal knowledge of the facts set forth in this Declaration of Assessment Work having caused the work to be performed or witnessed the same during or after its completion and, to the best of my knowledge, the annexed report is true.

Signature of Recorded Holder or Agent	Date
Larry J. Stoliker	May 21/97
Agent's Address	Telephone Number / Fax Number
PO Box 1146 Kirkland Lake, Ont	(705) 567-9000 / (705) 567-1077

5. Work to be recorded and distributed. Work can only be assigned to claims that are contiguous (adjoining) to the mining land where work was performed, at the time work was performed. A map showing the contiguous link must accompany this form.

	Mining Claim Number. Or if work was done on other eligible mining land, show in this column the location number indicated on the claim map.	**Number of Claim Units.** For other mining land, list hectares.	**Value of work performed** on this claim or other mining land.	**Value of work applied** to this claim.	**Value of work assigned** to other mining claims.	**Bank.** Value of work to be distributed at a future date.
eg	TB 7827	16 ha	$26, 825	N/A	$24,000	$2,825
eg	1234567	12	0	$24,000	0	0
eg	1234568	2	$ 8, 892	$ 4,000	0	$4,892
1	L-1206267	1	$12397			$12397
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
		Column Totals	$12397			$12397

I, Larry J. Stoliker (Print Full Name), do hereby certify that the above work credits are eligible under subsection 7 (1) of the Assessment Work Regulation 6/96 for assignment to contiguous claims or for application to the claim where the work was done.

Signature of Recorded Holder or Agent Authorized in Writing: Larry J. Stoliker — Date: May 21/97

6. Instructions for cutting back credits that are not approved.

Some of the credits claimed in this declaration may be cut back. Please check (✓) in the boxes below to show how you wish to prioritize the deletion of credits:

- ☐ 1. Credits are to be cut back from the Bank first, followed by option 2 or 3 or 4 as indicated.
- ☐ 2. Credits are to be cut back starting with the claims listed last, working backwards; or
- ☐ 3. Credits are to be cut back equally over all claims listed in this declaration; or
- ☐ 4. Credits are to be cut back as prioritized on the attached appendix or as follows (describe):

RECEIVED
JUN 05 1997
MINING LANDS BRANCH

Note: If you have not indicated how your credits are to be deleted, credits will be cut back from the Bank first, followed by option number 2 if necessary.

For Office Use Only

Received Stamp: 97 JUN 3 PM 2 25 RECEIVED

Deemed Approved Date: Sept 2/97 — Date Notification Sent:

Date Approved: — Total Value of Credit Approved:

Approved for Recording by Mining Recorder (Signature):

Ontario

Ministry of Northern Development and Mines

Statement of Costs for Assessment Credit

Transaction Number (office use)
W9780.00597

Elsie Lake

Personal information collected on this form is obtained under the authority of subsection 6(1) of the Assessment Work Regulation 6/96. Under section 8 of the Mining Act, the information is a public record. This information will be used to review the assessment work and correspond with the mining land holder. Questions about this collection should be directed to the Chief Mining Recorder, Ministry of Northern Development and Mines, 6th Floor, 933 Ramsey Lake Road, Sudbury, Ontario, P3E 6B5.

Work Type	Units of Work Depending on the type of work, list the number of hours/days worked, metres of drilling, kilometres of grid line, number of samples, etc.	Cost Per Unit of work	Total Cost
Diamond Drilling	600 ft.		$10,111.50
Core logging	2 days	250/day	500.00
Field Supervision	4 days	250/day	1000.00
Core splitting	2 days	150/day	300.00
Assays	5 samples		55.00
Associated Costs (e.g. supplies, mobilization and demobilization).			
Report Preparation:	1 day	250/day	250.00
	1 day	150/day	150.00
Transportation Costs			30.00
Food and Lodging Costs			
		Total Value of Assessment Work	$12396.50

RECEIVED
JUN 05 1997
MINING LANDS BRANCH

Calculations of Filing Discounts:

1. Work filed within two years of performance is claimed at 100% of the above Total Value of Assessment Work.
2. If work is filed after two years and up to five years after performance, it can only be claimed at 50% of the Total Value of Assessment Work. If this situation applies to your claims, use the calculation below:

TOTAL VALUE OF ASSESSMENT WORK × 0.50 = Total $ value of worked claimed.

Note:
- Work older than 5 years is not eligible for credit.
- A recorded holder may be required to verify expenditures claimed in this statement of costs within 45 days of a request for verification and/or correction/clarification. If verification and/or correction/clarification is not made, the Minister may reject all or part of the assessment work submitted.

Certification verifying costs:

I, Larry J. Stolike (please print full name), do hereby certify, that the amounts shown are as accurate as may reasonably be determined and the costs were incurred while conducting assessment work on the lands indicated on the accompanying Declaration of Work form as Agent (recorded holder, agent, or state company position with signing authority) I am authorized to make this certification.

Signature	Date

Ministry of
Northern Development
and Mines

Ministère du
Développement du Nord
et des Mines

Ontario

Geoscience Assessment Office
933 Ramsey Lake Road
6th Floor
Sudbury, Ontario
P3E 6B5

Telephone: (888) 415-9846
Fax: (705) 670-5863

August 25, 1997

THOMAS JOHN ELI OBRADOVICH
P.O. BOX 1146
KIRKLAND LAKE, Ontario
P2N-3M7

Dear Sir or Madam:

Submission Number: 2.17374

Subject: Transaction Number(s):		**Status**
	W9780.00591	Deemed Approval

We have reviewed your Assessment Work submission with the above noted Transaction Number(s). The attached summary page(s) indicate the results of the review. WE RECOMMEND YOU READ THIS SUMMARY FOR THE DETAILS PERTAINING TO YOUR ASSESSMENT WORK.

If the status for a transaction is a 45 Day Notice, the summary will outline the reasons for the notice, and any steps you can take to remedy deficiencies. The 90-day deemed approval provision, subsection 6(7) of the Assessment Work Regulation, will no longer be in effect for assessment work which has received a 45 Day Notice.

Please note any revisions must be submitted in DUPLICATE to the Geoscience Assessment Office, by the response date on the summary.

If you have any questions regarding this correspondence, please contact Steve Beneteau by e-mail at beneteau_s@torv05.ndm.gov.on.ca or by telephone at (705) 670-5855.

Yours sincerely,

ORIGINAL SIGNED BY
Blair Kite
Supervisor, Geoscience Assessment Office
Mining Lands Section

Correspondence ID: 11255
Copy for: Assessment Library

Work Report Assessment Results

Submission Number: 2.17374

Date Correspondence Sent: August 25, 1997 **Assessor:** Steve Beneteau

Transaction Number	First Claim Number	Township(s) / Area(s)	Status	Approval Date
W9780.00591	1206267	TECK	Deemed Approval	August 22, 1997

Section:
16 Drilling PDRILL

Correspondence to:

Resident Geologist
Kirkland Lake, ON

Assessment Files Library
Sudbury, ON

Recorded Holder(s) and/or Agent(s):

Larry J. Stoliker
KIRKLAND LAKE, ONTARIO, CANADA

THOMAS JOHN ELI OBRADOVICH
KIRKLAND LAKE, Ontario

2973090 CANADA INC.
KIRKLAND LAKE, ON

LESLIE MICHAEL DYMENT
Swastika, Ontario

JOCELYNE ANNE KIDSTON
SWASTIKA, Ontario

G-3719

TECK TWP.

Ontario Ministry of Natural Resources

Ministry of Northern Development and Mines

42A01NE0289 2.17374 TECK

200

INDEX TO LAND DISPOSITION

PLAN

G-3719

TOWNSHIP

TECK

M.N.R. ADMINISTRATIVE DISTRICT

KIRKLAND LAKE

MINING DIVISION

LARDER LAKE

LAND TITLES/REGISTRY DIVISION

TIMISKAMING

Scale 1:20 000

1000 Metres 0 1000 2000 Metres

1000 Feet 0 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 Feet

Contour Interval 10 Metres

RECEIVED JUN 05 1997 MINING LANDS BRANCH

2.17374

AREAS WITHDRAWN FROM DISPOSITION

MRO - Mining Rights Only
SRO - Surface Rights Only
M + S - Mining and Surface Rights

Description	Order No.	Date	Disposition	File
(R) SEC 35 WITHDRAWAL	W-L-9/97 NER	APRIL 22/97	SRO	

SYMBOLS

Boundary
Township, Meridian, Baseline
Road allowance; surveyed
shoreline
Lot/Concession; surveyed
unsurveyed
Parcel; surveyed
unsurveyed
Right-of-way; road
railway
utility
Reservation
Cliff, Pit, Pile
Contour
Interpolated
Approximate
Depression
Control point (horizontal)
Flooded land
Mine head frame
Pipeline (above ground)
Railway; single track
double track
abandoned
Road; highway, county, township
access
trail, bush
Shoreline (original)
Transmission line
Wooded area

DISPOSITION OF CROWN LANDS

Patent
Surface & Mining Rights
Surface Rights Only
Mining Rights Only
Lease
Surface & Mining Rights
Surface Rights Only
Mining Rights Only
Licence of Occupation
Order-in-Council — OC
Cancelled
Reservation — R
Sand & Gravel — P

THE INFORMATION THAT APPEARS ON THIS MAP HAS BEEN COMPILED FROM VARIOUS SOURCES, AND ACCURACY IS NOT GUARANTEED. THOSE WISHING TO STAKE MINING CLAIMS SHOULD CONSULT WITH THE MINING RECORDER, MINISTRY OF NORTHERN DEVELOPMENT AND MINES, FOR ADDITIONAL INFORMATION ON THE STATUS OF THE LANDS SHOWN HEREON.

ARCHIVED DEC. 12, 1996
ARCHIVED APR. 22/96.

CIRCULATED SEPT 23/93

ARCHIVED JUNE 01

Map base and land disposition drafting by Surveys and Mapping Branch, Ministry of Natural Resources.

The disposition of land, location of lot fabric and parcel boundaries on this index was compiled for administrative purposes only.

G-3719