42A01SE0021 45 TECK



# DIAMOND DRILLING


TOWNSHIP: Teck

REPORT NO.: 45

WORK PERFORMED BY: Labrador Exploration Ltd.

| CLAIM NO. | HOLE NO. | FOOTAGE | DATE | NOTE |
|---|---|---|---|---|
| L 495720 | DK-82-1 | 417.0 | Sept/82 | (1) (2) |
| L 495721 | DK-82-2 | 247.0 | Sept/82 | (1) (2) |
| | DK-82-3 | 330.0 | Sept/82 | (1) (2) |
| L 495722 | DK-82-4 | 500.0 | Sept/82 | (1) (2) |
| L 565134 | DK-82-6 | 455.0 | Sept/82 | (1) (2) |
| | | 1949 | | |

NOTES: (1) #435-82
(2) OMEP Submittal: OM82-6-C-9

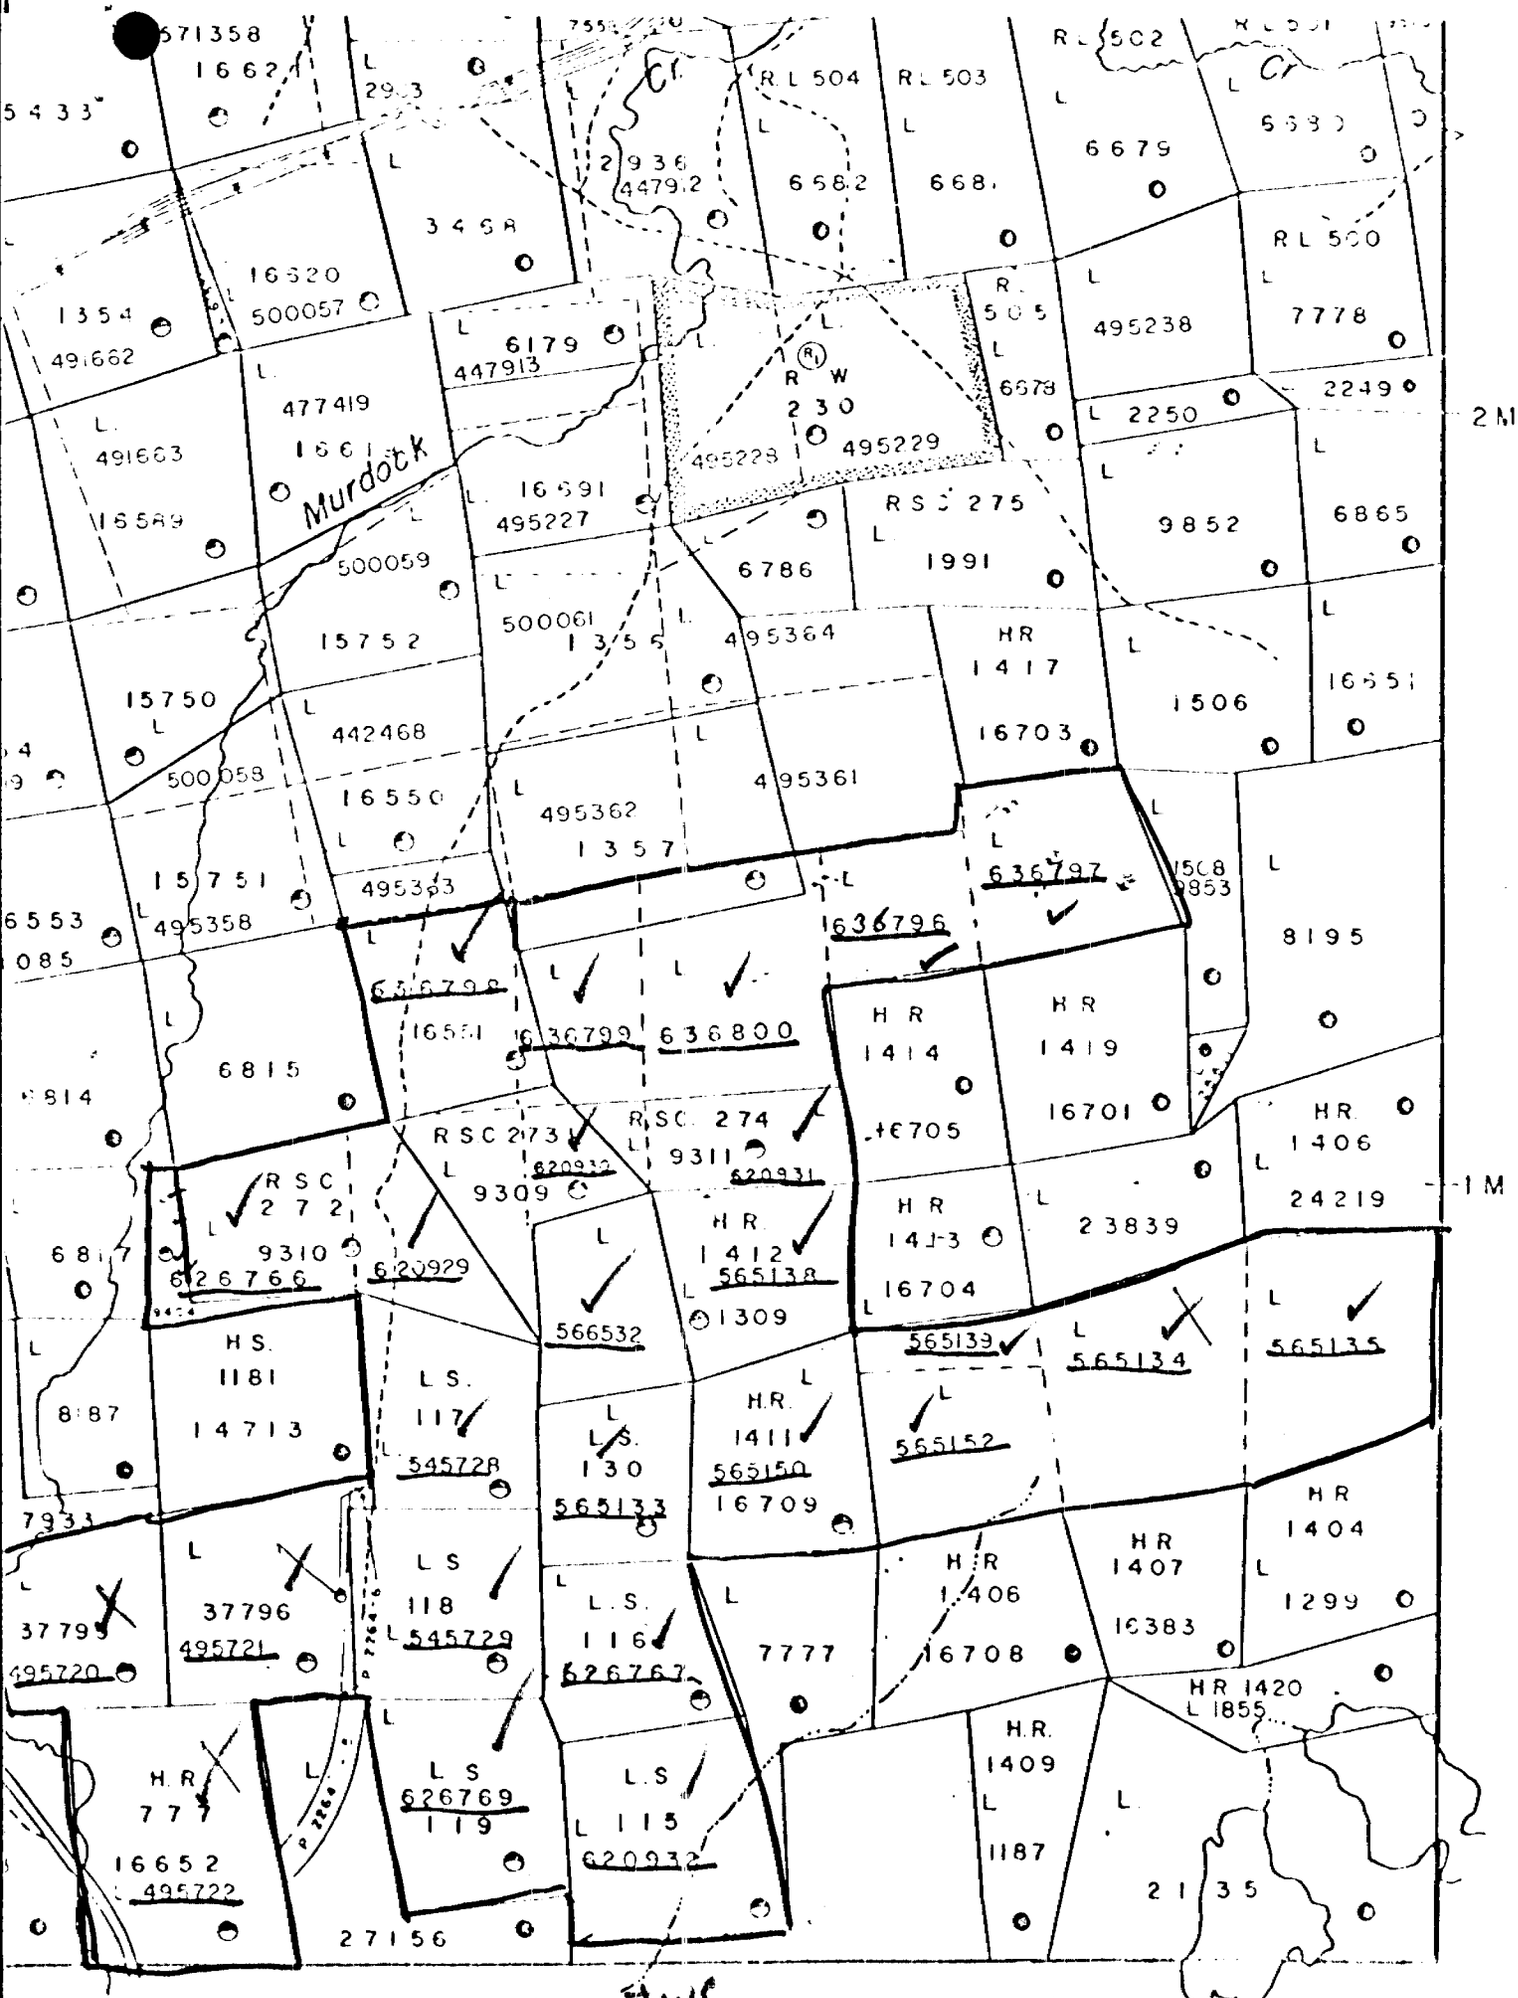


Teck M 392

#435-82

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE — HOLE NO. DK-82-1 — PAGE NO. 1

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY: Morissette Limited | COLLAR ELEVATION: | BEARING OF HOLE FROM TRUE NORTH: 170° | TOTAL FOOTAGE: 417 | DIP OF HOLE AT: collar 50° | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM: see accompanying plan |
| DATE HOLE STARTED: Sept 15/82 | DATE COMPLETED: Sept 16/82 | DATE LOGGED: Sept 17/82 | LOGGED BY: T. P. Ryan | 100 ft 51°36' corrected | MAP REFERENCE NO.: M-392 |
| EXPLORATION CO., OWNER OR OPTIONEE: Labrador Exploration (Ontario) Limited | | DATE SUBMITTED: | SUBMITTED BY (Signature): Bruce P. Ryan | 417 ft 46°06' corrected | CLAIM NO.: L 495720 |
| | | | | | LOCATION (Tp., Lot, Con. OR Lot. and Long.): Teck Township |
| | | | | | PROPERTY NAME: Dyment-Kidston Teck A Project |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 10 | Casing | | | | | | | | |
| 10 | 151 | Basalt | - grey-black in colour<br>- fine to medium grained, amphibole, biotite, quartz<br>- massive<br>- occasional small stringers and veinlets of quartz and quartz-calcite<br>- occasional bleb of cubic pyrite <1%<br>- some quartz veins contain chlorite mineralization | | | | | | | |
| 151.0 | 176.5 | Feldspar Porphyry | - fine grained, grey groundmass<br>- phenocrysts of white to pinkish feldspar and occasional quartz phenocrysts<br>- occasional calcite blebs<br>- Narrow quartz veins at 160.5; 162.0 (with chlorite) 168.0 and 168.2 Quartz veins less than 1" in width<br>175.5 - 176.5 1% - 2% disseminated cubic pyrite<br>Contact 21° to core axis | | | | | | | |
| 176.5 | 194.5 | Basalt | - Similar to section 10-151.0<br>- grey-green, fine grained groundmass, slightly chloritized<br>- massive<br>- minor epidote alteration locally<br>- occasional quartz-calcite veins usually less than 1", some carrying minor cubic pyrite<br>176.5 - 178.4 Basalt fragmented by quartz veining with <2% blebs of pyrite<br>180 - 182.0 Calcareous groundmass | | | | | | | |

+ Additional credit available. See Assessment Work Regulation

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-1 | 2 |

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY | | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar ° |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° |
| | | | | | ft ° |
| | | | | | ft ° |

LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM

MAP REFERENCE NO.

CLAIM NO.

LOCATION (Tp., Lot, Con. OR Lat. and Long.)

PROPERTY NAME

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 194.5 | 231.2 | Basalt | - Finer grained than above section<br>- grey-green colour, slightly siliceous groundmass<br>- weakly foliated<br>- local frgamented section with quartz-calcite veining with an occasional speck of chalcopyrite<br><br>209.2 - 214.5 Quartz blebs and veining slightly magnetic<br>221.0 - 221.6 Siliceous section with 2% pyrite and occasional bleb of chalcopyrite<br>228.2 - 231.2 Abundant quartz-calcite stringers in stockwork form Fragmented | | | | | | | |
| 231.2 | 285.9 | Graphite Argillaceous | - fine grained black graphitic bands alternating with fine grained grey siliceous bands<br>- numerous stringers and veinlets of quartz and quartz-calcite<br>- local stockworks of quartz veining<br>- sulphide mineralization consists of pyrite and pyrrhotite occurring as blebs and in laminae<br>- pyrite and pyrrhotite also fill minute fractures<br>- occasional bleb of chalcopyrite associated with the pyrrhotite<br>- sulphides range from 1% to 3%<br><br>Banding at 237' - 55° to core axis<br>250' - 65° to core axis<br>278' - 45° to core axis<br>285' - 63° to core axis | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-1 | PAGE NO. 3

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 285.9 | 317.3 | Basalt | - Similar to section 194.5 - 231.2 | | | | | | | |
| 317.3 | 325.0 | Argillite Graphite | - Similar to section 231.2 - 285.9 minor amounts of graphite<br>- fine grained - black<br>- pyrite blebs and stringers >2% to <3%<br>- occasional narrow bands ≈5" wide of basaltic material<br>- banding averages 43° to core axis<br><br>Contact 53° to core axis | | | | | | | |
| 325.0 | 350.5 | Variolitic Basalt | - fine grained, grey-black to grey-green groundmass<br>- variolites, feldspar, pale green-grey<br>- generally coalesced into zones of 4" widths<br>- occasional quartz veinlets and stringers some with pink and reddish material (feldspathic?)<br>- Variolites decrease in number towards end of section with section becoming a fine grained basalt.<br><br>325.0 - 327 brecciated angular to round<br><br>- fragments ranging in size from 1mm to 15mm<br>- fragments are light grey in colour, feldspathic and siliceous<br>- occasional bleb of pyrite<br><br>327.0 - 328.5 siliceous, with narrow bands of brecciated material. Foliated at 25° to core axis<br>- pryite in blebs and stringers <2% with occasional speck of chalcopyrite, some brown specks possibly sphalerite? | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

HOLE NO. DK-82-1 | PAGE NO. 4

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| | | | | ft ° | | | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 350.5 | 417.0 | Basalt | - fine to medium grained, dark grey - green to black groundmass<br>- massive<br>- coarser grained sections are of gabbroic or diorite texture<br>- slightly chloritized, pyrite cakes <1% through section<br>- numerous quartz-calcite veinlets and stringers | | | | | | | |
| | | | END OF HOLE | | | | | | | |
| | | | Core checked for radioactivity and fluorescence - nothing of interest. | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-2 | PAGE NO. 1

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY: Morissette Diamond Drilling Co. | COLLAR ELEVATION: | BEARING OF HOLE FROM TRUE NORTH: 350° | TOTAL FOOTAGE: 247 | DIP OF HOLE AT: collar 45° | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM: see accompanying plan |
| DATE HOLE STARTED: Sept 18/82 | DATE COMPLETED: Sept 19/82 | DATE LOGGED: Sept 20/82 | LOGGED BY: T. P. Ryan | 100 ft 45°6' | MAP REFERENCE NO.: M-392 |
| EXPLORATION CO., OWNER OR OPTIONEE: Labrador Exploration (Ontario) Limited | DATE SUBMITTED: | SUBMITTED BY (Signature): Thomas P. Ryan | 200 ft 47°6' | | CLAIM NO.: L 495721 |
| | | | ft ° | | LOCATION (Tp., Lot, Con. OR Lot. and Long.): Teck Township |
| | | | ft ° | | PROPERTY NAME: Dyment-Kidston Teck "A" |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 35 | Casing | | | | | | | | |
| 35 | 48.2 | Basalt | Fine grained, green-black groundmass<br>- amphibole needles, biotite, feldspar<br>- slightly foliated<br>- pyrite as blebs and fracture filling <1%<br>- contact 17° to core axis | | | | | | | |
| 48.2 | 118.75 | Variolitic Basalt | - fine grained, light green massive groundmass<br>- variolites pale grey-green colour, feldspathic composition<br>49.0 - 52.0 Quartz calcite veining with chlorite inclusions<br>112-116 and 119.5-121.0 - moderately calcareous | | | | | | | |
| 118.75 | 247.0 | Basalt | - fine grained, green black groundmass<br>- massive<br>121-131 - moderately calcareous<br>- pyrite blebs, cubic 1%<br>137-155 numerous quartz calcite veins<br>pyrite ≈ 1%<br>foliation at 20° to core axis<br>165.5-168 - lens of variolitic basalt - similar to 48.2 - 118.75<br>171-6 - 175.6 brecciated, basalt impregnated by quartz and quartz-calcite veinlets and veins possible fault | | | | | | | |
| | | | END OF HOLE - Hole stopped - possibly drilled down dip of geological formations | | | | | | | |
| | | | Hole checked for radioactivity - nothing of interest<br>" " " fluorescence - Blue & white stringers at 137 and 144.4 - both on longwave and shortwave<br>- probably calcite. | | | | | | | |

Thomas P. Ryan

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-3 | PAGE NO. 1

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY: Morissette Diamond Drilling Co. | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH: 170° | TOTAL FOOTAGE: 330 | DIP OF HOLE AT: collar 45° / 100 ft 48° / 330 ft 46° / ft / ft | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM: see accompanying plan |
| DATE HOLE STARTED: Sept 20/82 | DATE COMPLETED: Sept 22/82 | DATE LOGGED: Sept 24/82 | LOGGED BY: C. Hartley | | |
| EXPLORATION CO., OWNER OR OPTIONEE: Labrador Exploration (Ontario) Limited | DATE SUBMITTED | SUBMITTED BY (Signature): Ismael Pigeon | | | |

MAP REFERENCE NO.: M-392 | CLAIM NO.: L 495721
LOCATION (Tp., Lot, Con. OR Lot. and Long.): Teck Township
PROPERTY NAME: Dyment-Kidston-Teck "A"

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 7 | | Casing | | | | | | | |
| 7 | 330 | Basalt | Light to medium grey coloured with dark grey coloured sections. Fine to medium grained with occasional coarser grained gabbroic or diabasic sections. Massive with occasional quartz and/or carbonate stringers 0.5 to 2mm scattered throughout. Rock is composed of horneblende, pyroxene and plagioclase. | | | | | | | |
| | | | Very rare quartz-vein 2cm to 15cm thick | | | | | | | |
| | | | Alteration consists mainly of minor carbonate alteration throughout the entire length of the hole with local moderate to intense carbonate and calcareous sections. | | | | | | | |
| | | | Local carbonate and quartz-carbonate sections<br>9.5 to 10.2 quartz carbonate veins<br>31.5 to 32.0 30° to core axis<br>51.5 to 52.5 1cm to 2cm quartz carbonate vein<br>91.5, 92, 92.5 30° to core axis | | | | | | | |
| | | | Quartz-carbonate vein<br>141.5 to 142.5 30° to core axis<br>Quartz-carbonate veins<br>145 to 146.5 40° to core axis<br>148 to 148.5 40° to core axis | | | | | | | |
| | | | Calcareous and carbonate alteration moderate to intense<br>91 to 97.2 170-173 232 to 248<br>182-188.5 298 to 316<br>196-221 | | | | | | | |

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-3 | PAGE NO. 2

| | | | | |
|---|---|---|---|---|
| DRILLING COMPANY | | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | DIP OF HOLE AT collar ° |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | ft ° / ft ° / ft ° / ft ° |

LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM

MAP REFERENCE NO. | CLAIM NO.

LOCATION (Tp., Lot, Con. OR Lat. and Long.)

PROPERTY NAME

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE ± | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS ± |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | Quartz-carbonate veins Angle to Long Core Axis | | | | | | | |
| | | | 1/2" to 1" veins 60 30° | | | | | | | |
| | | | 60.5 30° | | | | | | | |
| | | | 91.5 30° | | | | | | | |
| | | | 92 30° | | | | | | | |
| | | | 92.5 30° | | | | | | | |
| | | | 12" veins 51.5 to 52-5 30° | | | | | | | |
| | | | 12" veins 94.5 to 95.5 30° | | | | | | | |
| | | | 145 to 146 40° | | | | | | | |
| | | | 141.5 to 142.5 30° | | | | | | | |
| | | | 6" veins 31.5 to 32.0 30° | | | | | | | |
| | | | 243.2 to 243.8 20° | | | | | | | |
| | | | 255.5 to 256.0 65° | | | | | | | |
| | | | 1/2" to 1" veins 147.3 30° | | | | | | | |
| | | | 250 65° | | | | | | | |
| | | | 297.5 40° | | | | | | | |
| | | | Slightly coarser grained diabasic and/or gabbroic sections | | | | | | | |
| | | | 76 to 91.5 contact gradational over a few inches | | | | | | | |
| | | | 97.5 to 112.5 contact gradational at 97.5 over a few inches and sharp at 112.5 to 15° to long core axis | | | | | | | |
| | | | 117 to 129 with sharp contacts | | | | | | | |
| | | | 20° to long core axis at 117 | | | | | | | |
| | | | 85° to long core axis at 129 | | | | | | | |
| | | | 130.7 to 140.6 with a sharp contact at 130.7 | | | | | | | |
| | | | 70° to long core axis; and contact gradational over 2 to 3 inches at 140.6 | | | | | | | |
| | | | 220.5 to 232 with sharp contacts: | | | | | | | |
| | | | 12° to Long core axis at 220.5 and | | | | | | | |
| | | | 40° to long core axis at 232 | | | | | | | |

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG


Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-3 | 3 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | ft ° | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| | | | | ft ° | | | |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 251 to 252 Light green coloured and slightly coarser grained with sharp contact 90° to long core axis at 251 and gradation over 2 to 3 inches at 252 | | | | | | | |
| | | | 185 to 197 Brecciated with angular breccia fragments averaging 2 to 3mm in diameter and vary from a fine ground mass to 10 to 12mm in diameter. | | | | | | | |
| | | | 212 to 218 Brecciated: fine breccia within carbonate stringers | | | | | | | |
| | | | Mineralization consists of trace to 0.5% fine disseminated pyrite throughout with chalcopyrite | | | | | | | |
| | | | 256 to 261 schistone 30° to long core axis with significant increase in pyrite content to 2-3% fine disseminated pyrite | | | | | | | |
| | | | 295 to 302 very similar to 256 to 261; schistose 30° to long core axis with 2 to 3% fine disseminated pyrite | | | | | | | |
| | | Basalt | 318 to 330 variolitic | | | | | | | |
| | 330 | | END OF HOLE | | | | | | | |
| | | | Core checked for radioactivity and fluorescence. Nothing of economic interest. | | | | | | | |

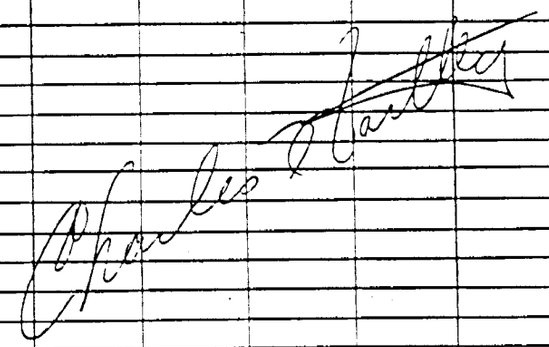

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-4 | PAGE NO. 1

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY: Morissette Diamond Drilling | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH: 080° | TOTAL FOOTAGE: 500 | DIP OF HOLE AT: collar 45.0° | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM: see accompanying plan |
| DATE HOLE STARTED: Sept 23/82 | DATE COMPLETED: Sept 24/82 | DATE LOGGED: Sept 25/82 | LOGGED BY: C. Hartley | 100 ft 45.0° | MAP REFERENCE NO.: M-392 |
| EXPLORATION CO., OWNER OR OPTIONEE: Labrador Exploration (Ontario) Limited | | DATE SUBMITTED | SUBMITTED BY (Signature): Duncan F. Ryan | 500 ft 49.5° | CLAIM NO.: L 495-722 |
| | | | | ft | LOCATION (Tp., Lot, Con. OR Lot. and Long.): Teck |
| | | | | ft | PROPERTY NAME: TECK "A" Dyment-Kidston Property |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 10 | | Casing | | | | | | | |
| 10 | 57 | Basalt | Medium to dark grey coloured, aphanitic, weakly to moderately calcareous, massive, Calcite stringers <1 mm common. Irregular hematite-magnetite layers ≈1 mm to 3 mm thick averaging approximately 1 per foot, normally 50° to 55° to long core axis with micro faulting of hematite-magnetite layers common. | | | | | | | |
| | | | 17 to 27 core fractured and broken with two feet core lost | | | | | | | |
| | | | 24.5 to 28 and 30 to 35 Brecciated with abundant quartz-carbonate material with veining and veinlets numerous. Micro faulting of veinlets common. Veinlets vary from sub-parallel to 70° to long core axis. | | | | | | | |
| | | | 27 to 37 core fractured and broken with 1 core lost | | | | | | | |
| | | | Trace to 0.5% disseminated pyrite throughout and in brecciated section within fragments and on fracture surface but notable lack within quartz carbonate | | | | | | | |
| | | | 32 - 1" Pyrite quartz carbonate filling with cubic pyrite. 30° to long core axis | | | | | | | |
| | | | 33 to 34 and 36.5 to 37 Broken carbonate and rust brown colouring and very calcareous | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 2 |

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY | | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT<br>collar °<br>ft °<br>ft °<br>ft ° |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | | |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | | |

LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM

MAP REFERENCE NO. | CLAIM NO.

LOCATION (Tp., Lot, Con. OR Lat. and Long.)

PROPERTY NAME

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION<br>Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE * | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 1/2" to 1" quartz carbonate veins<br>Angle to long core axis<br>44 — 50°<br>44.5 — 5°<br>45.5 — 20°<br>51 — 30°<br>51.5 — 30°<br>54 — 48°<br>54.5 — 40° | | | | | | | |
| | | | 45.5 to 47.5 Brecciated with 10% to 30% quartz carbonate material<br>49 to 54 Schistose 50° long core axis | | | | | | | |
| 57 | 68.5 | Talc? Chlorite Schist | Light to dark green coloured, fine grained, schistose 37° to core axis at 58 feet 30° at 67 feet; with minor carbonatization. Contact with upper basaltic unit sharp at 55° to long core axis | | | | | | | |
| | | | Quartz-carbonate stringers at:<br>Angle to long core axis<br>57' — 30°<br>57.5' — 30°<br>58' — 15°<br>59' — 55°<br>60' — 45° | | | | | | | |
| | | | Minor fuchsite 1" at 58 feet<br>2" at 61.5 feet<br>6" at 68 to 68.5 | | | | | | | |
| | | | Trace to 1% fine disseminated pyrite as fine cubes throughout, commonly parallel to schistosity | | | | | | | |

* For [illegible] such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 3 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | Trace scheelite observed 68 to 68.5 parallel to schistosity (blue fluorescence under short wave ultra violet light) | | | | | | | |
| 68.5 | 76.7 | Meta Greywacke | Light brown to light grey coloured, fine to medium grained, with small fuchsite clasts 2 to 5 mm in diameter. Contact with upper unit sharp at 35° to long core axis. Massive to slightly schistose 40° to long core axis. | | | | | | | |
| | | | 71 to 74.5 medium grey coloured<br>1" fuchsite 68.7 and 70 30° to long core axis<br>with ≺ 3% cubic pyrite at 70' | | | | | | | |
| 76.7 | 81.8 | Fuchsite | Bright green coloured, fine grained schistose 35° to long core axis Contact with upper unit sharp at 35° | | | | | | | |
| | | | 1/2" to 1" quartz veins Angle to long core axis<br>79 85°<br>79.7 35°<br>80.8 40°<br>81.1 50°<br>20° | | | | | | | |
| | | | 81.4 to 81.8 quartz vein 50° to core axis<br>79 to 79.3 light brown coloured with sharp contacts 37° to core axis | | | | | | | |
| | | | 1% to 2% disseminated pyrite as well as cubes throughout. Quartz veins barren. | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 4 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| | | | | ft ° | | | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE * | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 81.8 | 88 | Meta Greywacke | Fine grained, light reddish brown coloured with very shallow core angles | | | | | | | |
| | | | Schistose 81.8 to 85.5 ~ 07° to long core axis | | | | | | | |
| | | | 85.5 to 88 ~ 40° to long core axis | | | | | | | |
| | | | 81.8 to 82.8 50% quartz vein material with a 1" cross cutting quartz vein 20° to long core axis | | | | | | | |
| | | | Brecciated | | | | | | | |
| | | | 85.0 to 85.5 70° quartz vein material | | | | | | | |
| | | | ≈ 0.5% disseminated fine cubic pyrite throughout | | | | | | | |
| 88 | 105.6 | Talc? Chlorite Schist | Medium to dark green coloured, soft (Hardness ≈ 3) fine grained schistose 35° to long core axis | | | | | | | |
| | | | Contact with upper unit sharp at 35° to long core axis | | | | | | | |
| | | | 93 - 1/2" quartz vein 40° to LCA | | | | | | | |
| | | | 99 to 105.6 dark green coloured and slightly more massive, aphanitic | | | | | | | |
| | | | 101.5 1/4" quartz vein | | | | | | | |
| | | | Trace to 0.5% fine disseminated cubic pyrite throughtout | | | | | | | |
| 105.6 | 112 | Meta Greywacke | Fine grained siliceous, light brown green coloured, slightly schistose 40° to long core axis. Contact with upper unit gradational over 2 to 3 inches | | | | | | | |
| | | | 107.5 to 108.5 50% quartz vein material | | | | | | | |
| | | | 107.5 to 108.5 Dark green talc-chlorite with sharp contact, 30° to long core axis at 107.5 and 108.5 | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-4 | PAGE NO. 5

| | | | | |
|---|---|---|---|---|
| DRILLING COMPANY | | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE / DIP OF HOLE AT collar ° / ft ° / ft ° / ft ° / ft |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | |

LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM

MAP REFERENCE NO. | CLAIM NO.

LOCATION (Tp., Lot, Con. OR Lot. and Long.)

PROPERTY NAME

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 0.5 to 1% fine disseminated cubic pyrite throughout | | | | | | | |
| 112 | 141.2 | Talc Chlorite Schist | Medium to dark green coloured, very fine grained to aphanitic, schistose 112 to 127 45° to long core axis and massive 127 to 135 and schistose 135 to 141 45° to long core axis | | | | | | | |
| | | | 1/4" to 1/2" quartz veins — angle to core axis: 129.7 — 35°; 136.5 — 30°; 138.5 — 85° | | | | | | | |
| | | | 140.8 to 141 2" fuchsite with sharp contacts 35° to long core axis | | | | | | | |
| | | | Trace to 0.5% disseminated cubic pyrite throughout | | | | | | | |
| 141.2 | 142 | Greywacke | As above with sharp contacts 50° to long core axis | | | | | | | |
| 142 | 220 | Talc Chlorite Schist | Black to dark green coloured with prevasive chlorite and talc, fine grained schistose 40° to long core axis. Banded white and dark green to black coloured. | | | | | | | |
| | | | 152.6 to 153.1 Greywacke as above | | | | | | | |
| | | | 153.1 to 153.8 75% quartz carbonate material 20° to long core axis | | | | | | | |
| | | | 156.5 1/2 inch quartz vein with fuchsite 85° to long core axis | | | | | | | |
| | | | 161 to 164 Shallow core angles 20° to long core axis | | | | | | | |
| | | | 161.5 and 162.2 1/4' quartz veins 70° to long core axis cross cutting schistosity | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 6 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° | | LOCATION (Tp., Lot, Con. OR Lot. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 163 1/2" quartz vein parallel to schistosity 25° to long core axis | | | | | | | |
| | | | 170.5 1" quartz vein with fuchsite 80° to long core axis | | | | | | | |
| | | | 180.5 1/2" quartz vein with pyrite 20° to long core axis | | | | | | | |
| | | | 198.5 to 199 50% quartz vein material | | | | | | | |
| | | | 213.5 1" quartz vein 40° to long core axis | | | | | | | |
| | | | 215.3 1/4" quartz vein 35° to long core axis cross cutting schistosity | | | | | | | |
| | | | 216.2 to 216.4 Greywacke - as above | | | | | | | |
| | | | 216.4 to 217 80% quartz vein material with minor fuchsite | | | | | | | |
| | | | Trace disseminated cubic pyrite throughout in cubes 1mm in diameter | | | | | | | |
| 220 | 260 | Meta-greywacke | Light grey-brown coloured, fine grained, massive with rare sub-angular chloritic clasts to 5mm in diameter or fuchsite clast. Clasts 2 to 7mm. Contact with upper talc-chlorite schist sharp 35° to LCA. Rare 1/2" to 1/4" quartz vein averaging 1 or 2 per 5 feet. | | | | | | | |
| | | | 1/4" to 1/2" white to pink quartz vein angle to long core axis | | | | | | | |
| | | | 220.5 30° | | | | | | | |
| | | | 225 80° | | | | | | | |
| | | | 228.2 50° | | | | | | | |
| | | | 235.6 15° | | | | | | | |
| | | | 238.2 20° | | | | | | | |
| | | | 241.5 30° | | | | | | | |
| | | | 244 60° | | | | | | | |
| | | | 246 60° | | | | | | | |
| | | | 249 50° | | | | | | | |
| | | | 253.8 75° | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 7 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft | | LOCATION (Tp., Lot, Con. OR Lot. and Long.) | |
| | | | | ft | | | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft | | PROPERTY NAME | |
| | | | | ft | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 249.5 to 253.3 Pink coloured vuggy quartz vein with 1% disseminated pyrite and trace specularite. Vugs have calcite on surface. | | | | | | | |
| | | | 254-255 Pink coloured quartz vein with trace | | | | | | | |
| | | | 259.4-259.8 Large fuschite clast | | | | | | | |
| 260 | 292 | Fuchsite | Bright green coloured, fine grained, schistose with occasional quartz veinlets and numerous quartz stringers 1mm in diameter throughout | | | | | | | |
| | | | 0.5 to 1% disseminated cubic pyrite throughout | | | | | | | |
| | | | Core angles vary widely throughout section | | | | | | | |
| | | | Footage — Core angle | | | | | | | |
| | | | 261 — 30° | | | | | | | |
| | | | 263 — 20° | | | | | | | |
| | | | 266 — 10° | | | | | | | |
| | | | 268 — parallel to core axis | | | | | | | |
| | | | 270 — 15° | | | | | | | |
| | | | 274 — 30° | | | | | | | |
| | | | 281 — parallel to core axis | | | | | | | |
| | | | 283 — 10° | | | | | | | |
| | | | 286 — 40° | | | | | | | |
| | | | 288 — 15° | | | | | | | |
| | | | 290 — parallel to core axis | | | | | | | |
| | | | 291 — 40° | | | | | | | |
| | | | 1/4" to 1/2" quartz veinlets — Angle to core axis | | | | | | | |
| | | | 264.5 — 10° | | | | | | | |
| | | | 265 — 65° | | | | | | | |
| | | | 266.3 — 80° | | | | | | | |
| | | | cont'd | | | | | | | |

* For features such as foliation, bedding, schistosity, measured from the long axis of the core.

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 8 |

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY | | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar ° |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° |
| | | | | | ft ° |
| | | | | | ft ° |

LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM

MAP REFERENCE NO. | CLAIM NO.

LOCATION (Tp., Lot, Con. OR Lot. and Long.)

PROPERTY NAME

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 267 60° | | | | | | | |
| | | | 268.6 70° | | | | | | | |
| | | | 270 45° | | | | | | | |
| | | | 270.8 to 271.2 50° | | | | | | | |
| | | | 272.7 50° | | | | | | | |
| | | | 1/4" to 1/2" quartz veinlets Angle to core axis | | | | | | | |
| | | | 273.6 45° | | | | | | | |
| | | | 275.3 35° | | | | | | | |
| | | | 276.5 70° | | | | | | | |
| | | | 278.4 50° | | | | | | | |
| | | | 280.3 40° | | | | | | | |
| | | | 282.0 50° | | | | | | | |
| | | | 284.5 25° | | | | | | | |
| | | | 287.1 to 287.4 25° | | | | | | | |
| | | | 288.6 30° | | | | | | | |
| | | | 292.1 35° | | | | | | | |
| | | | 50° | | | | | | | |
| 292 | 488.5 | Talc-Chlorite Schist | | | | | | | | |
| | | | Dark green to dark brown to occasionally bright green coloured, fine grained with varying amounts of fuchsite with occasional quartz veinlets and numerous quartz and/or calcite stringers. Massive to schistose. | | | | | | | |
| | | | 1/4" to 1/2" quartz veins Angle to core axis | | | | | | | |
| | | | 308 80° | | | | | | | |
| | | | 311 40° | | | | | | | |
| | | | 311.5 45° | | | | | | | |
| | | | 316 40° | | | | | | | |
| | | | 317 40° | | | | | | | |
| | | | 318.5 65° | | | | | | | |
| | | | 319 to 319.5 parallel to core axis | | | | | | | |
| | | | 323 35° | | | | | | | |
| | | | 326.5 35° | | | | | | | |
| | | | 342.5 40° | | | | | | | |
| | | | 352 80° | | | | | | | |

ONTARIO

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-4 | 10 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar ° | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft ° | | LOCATION (Tp., Lot, Con. OR Lot. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft ° | | | |
| | | | | ft ° | | PROPERTY NAME | |
| | | | | ft ° | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 445 to 488 massive to very rarely slightly schistose | | | | | | | |
| 488.5 | 500 | Meta-greywacke | Fine grained, light red-brown coloured, massive to very slightly schistose ≈ 40° to long core axis<br>Contact with upper unit sharp at 50° to long core axis<br><br>Trace to 0.5% fine disseminated pyrite throughout<br><br>1/4" to 1/2" veinlets Angle to long core axis<br>492 15°<br>495 30°<br>498 20°<br>499 20° | | | | | | | |
| | 500 | | END OF HOLE<br><br>Core checked for radioactivity and fluorescence. Nothing of interest. | | | | | | | |

+ Additional credit available. See Assessment Work Regulations.

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-6 | PAGE NO. 1

| | | | | | |
|---|---|---|---|---|---|
| DRILLING COMPANY: Morissette Drilling Co. Ltd. | COLLAR ELEVATION: | BEARING OF HOLE FROM TRUE NORTH: 283° | TOTAL FOOTAGE: 455 | DIP OF HOLE AT: 45° collar | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM: see accompanying plan |
| DATE HOLE STARTED: Sept 29/82 | DATE COMPLETED: Oct 1/82 | DATE LOGGED: Oct 12/82 | LOGGED BY: C. Hartley | 100 ft \| 46.5° | MAP REFERENCE NO.: M-392 |
| EXPLORATION CO., OWNER OR OPTIONEE: Labrador Exploration (Ontario) Limited | DATE SUBMITTED: | SUBMITTED BY (Signature): Ignace P Ryan | 300 ft \| 43° | CLAIM NO.: L565134 | LOCATION (Tp., Lot, Con. OR Lat. and Long.): Teck Township |
| | | | ft \| | PROPERTY NAME: Dyment-Kidston Teck "A" | |
| | | | ft \| | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 20 | | Casing | | | | | | | |
| 20 | 23.2 | Greywacke | Red-grey coloured, fine grained, massive fractured 25° to long core axis. Sub-angular clasts locally of chloritic material up to 1/4 inch material. | | | | | | | |
| | | | Trace fine disseminated pyrite | | | | | | | |
| 23.2 | 30 | Basalt | Basalt, mafic volcanic, banded 65° to long core axis, banding dark green and white, fine grained. | | | | | | | |
| | | | 26.4-27.2; 27.8-28; 28.8-29; 29.3-29.7 Syenite, quartz-feldspar porphyry, very siliceous, medium grained, orange-red coloured; contacts with mafic volcanics sharp 65° to 70° long core axis. | | | | | | | |
| | | | 1% disseminated pyrite throughout | | | | | | | |
| 30 | 43 | Greywacke | Arkosic? medium grained, massive, red-brown coloured with mafic clasts locally scattered throughout, averaging 1/8 to 38 inch in diameter, but vary from 1/16 to 1 inch in diameter. | | | | | | | |
| 43 | 49 | Basalt | Basalt-mafic volcanic very similar to 23.2 to 30; medium to light green-grey coloured banded with white, feldspathic layers 75° to long core axis. Zebra like texture | | | | | | | |
| | | | 43 to 43.5 50% quartz vein material | | | | | | | |
| | | | 48.5 to 48.7 quartz vein 70° to long core axis | | | | | | | |
| | | | Trace to 0.5% fine disseminated pyrite throughout. | | | | | | | |

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

HOLE NO. DK-82-6 | PAGE NO. 2

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar ° / ft ° / ft ° / ft ° / ft | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | | | PROPERTY NAME | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 49 | 56 | Greywacke | Light red brown coloured to light pale green coloured, with very gradational contact with upper basalt unit 49 to 52 | | | | | | | |
| | | | 49.52 banded 85° to long core axis with local quartz stringers 75° to long core axis | | | | | | | |
| | | | 52 to 56 massive red-brown grading to pale green to 53.5 | | | | | | | |
| | | | 53.2 to 53.3 quartz-carbonate vein 80° to long core axis | | | | | | | |
| | | | 53.3 to 53.6 Basalt | | | | | | | |
| 56 | 76 | Quartz Tourmaline Vein | With minor bright green fuchsite, white coloured, with rust stained fractures 150° to long core axis. Local rare streaks of black tourmaline | | | | | | | |
| | | | 56-57; 61-62; 68-75 local tourmaline as fracture filling. Fractures erratic but average 35 to 40° long core axis | | | | | | | |
| | | | 62-68 Fuchsite with 30-40% quartz-carbonate vein material. Quartz veins 15° to 20° to long core axis. Trace pyrite usually on fracture surfaces | | | | | | | |
| | | | 76-77 Fuchsite with 10-20% quartz carbonate | | | | | | | |
| 77 | 92 | Greywacke | Massive, red-brown coloured with local 1/8 to 1/4 inch in diameter | | | | | | | |
| | | | Local trace amounts of pyrite. | | | | | | | |

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| KD-82-6 | 3 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar ° / ft ° / ft ° / ft ° | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | | | LOCATION (Tp., Lot, Con. OR Lot. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | | | PROPERTY NAME | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 77-79 very siliceous with 1/4 inch quartz-veinlets 75° to long core axis | | | | | | | |
| | | | 78.5-79 Quartz vein rust-brown coloured with trace pyrite | | | | | | | |
| | | | 79 to 80.4 Brecciated with angular fragments to 1 inch in diameter but average 1/4 to 1/2 inch in fine chloritic matrix with trace pyrite | | | | | | | |
| | | | 88.5 to 92 Gradational contact with mafic volcanic and bedding 50° to long core axis | | | | | | | |
| | | | Interbedded mafic volcanic and greywacke | | | | | | | |
| | | | 91.5 to 92 Quartz vein 55° to long core axis | | | | | | | |
| 92 | 118 | Basalt | Very fine grained to aphanitic, medium grey to slightly grey-green coloured, schistose 65° to long core axis to 112 and 50° to long core axis 112 to 118 | | | | | | | |
| | | | 112-118 aphanitic, calcareous, carbonate and chlorite alteration common with approx. 0.5% pyrite, parallel to schistosity | | | | | | | |
| | | | 194-194.5 Quartz vein | | | | | | | |
| | | | 1/4 quartz veinlets — Angle to core axis: 93 — 65°; 96.5 — 60°; 111 — 90° | | | | | | | |
| 118 | 120 | Greywacke | Massive, medium grained, dark purple coloured, purple hematite staining throughout. Contact with mafic volcanic sharp 80° to long core axis. Calcareous | | | | | | | |
| 120 | 123.2 | Basalt | as 112-118 Calcareous, carbonate alteration | | | | | | | |

THE MINING ACT – DEPARTMENT OF MINES
ONTARIO

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-6 | 4 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| | | | | collar | | | |
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft | | LOCATION (Tp., Lot, Con. OR Lot. and Long.) | |
| | | | | ft | | | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft | | PROPERTY NAME | |
| | | | | ft | | | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 123.2 | 131 | Greywacke | Medium grained, dark purple coloured, calcareous massive, containing local mafic clasts. Contact with upper unit distinct 75° to long core axis. | | | | | | | |
| | | | Trace 60.5% disseminated pyrite throughout | | | | | | | |
| | | | 125-127 Quartz stringers common 60° to long core axis | | | | | | | |
| | | | 124-125 Basalt as 112-118 with sharp contacts 80° to LCA, carbonate abundant | | | | | | | |
| | | | 1261.1-126.3 Quartz vein 55° to long core axis | | | | | | | |
| 131 | 144.5 | Greywacke & Basalt | Intercalated purple coloured greywacke and grey-green aphanitic basalt, Schistose locally 55° to long core axis. Calcareous - carbonate alteration moderate to intense. Trace to 1% pyrite locally. | | | | | | | |
| | | | 139-144.5 massive | | | | | | | |
| 144.5 | 151 | Basalt | Medium to dark grey-green coloured chlorite and carbonate alteration moderate to rarely intense. Calcite abundant in stringers. Massive to slightly schistose with core angles 50° to long core axis. | | | | | | | |
| 151 | 153.5 | Greywacke | Greywacke, purple coloured with slight schistose fabric 50° to long core axis with distinct contacts 80° to LCA. | | | | | | | |
| 153.5 | [illegible].5 | Basalt and Greywacke | Basalt with minor sediment. Massive to slightly schistose 50° to long core axis. Dark grey-green to dark purple-brown coloured. Chlorite and carbonate pervasive | | | | | | | |
| | | | Trace disseminated pyrite throughout | | | | | | | |

+ Additional credit available. See Assessment Work Regulations

ONTARIO

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-6 | 5 |

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar ° / ft ° / ft ° / ft ° / ft | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM | MAP REFERENCE NO. | CLAIM NO. |
|---|---|---|---|---|---|---|---|
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | | | LOCATION (Tp., Lot, Con. OR Lat. and Long.) | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | | | PROPERTY NAME | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| 157.5 | 455 | Basalt | Light to medium grey green coloured to medium green coloured, fine grained to aphanatic, usually massive to only are local schistose sections. Rare quartz stringer averaging 1 per 5 feet. Pervasive chlorite throughout and local carbonate alteration. | | | | | | | |
| | | | Calcite fracture filling throughout. | | | | | | | |
| | | | Carbonate alteration 157.5 to 166 and 191 to 101 and schistose 40° to long core axis | | | | | | | |
| | | | 91 to 101 pyrite content ≈ 1% except 99.5 to 100.5 ≈ 10% pyrite | | | | | | | |
| | | | Pyrite observed throughout section in trace amounts pyrrhotite is commonly observed in almost equal portions with the pyrite. Local trace amounts of chalcopyrite, especially 300 to 420. | | | | | | | |
| | | | 191 to 192 50% quartz vein material<br>218-220 medium grained with diabasic texture – gradational contacts<br>220 to 301.5 aphanitic and intense fine fractures throughout normally calcite filling of fractures is common | | | | | | | |
| | | | Local narrow (up to 6") siliceous zones – light grey coloured, massive, usually containing trace to 1% pyrite and pyrrhotite. | | | | | | | |
| | | | 1 inch to 1.5 inch calcite veins 228.7 and 232 80° to long core axis | | | | | | | |

Additional Logging Forms available. See Assessment Work Regulations

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

ONTARIO

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.

FILL IN ON EVERY PAGE ▶ HOLE NO. DK-82-6 | PAGE NO. 6

| DRILLING COMPANY | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar ° / ft ° / ft ° / ft ° |
|---|---|---|---|---|
| DATE HOLE STARTED / DATE COMPLETED | DATE LOGGED | LOGGED BY | | |
| EXPLORATION CO., OWNER OR OPTIONEE | DATE SUBMITTED | SUBMITTED BY (Signature) | | |

LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM

MAP REFERENCE NO. | CLAIM NO.

LOCATION (Tp., Lot, Con. OR Lot. and Long.)

PROPERTY NAME

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE ° | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 232 trace scheelite in calcite vein fluorescence on short wave ultra violet | | | | | | | |
| | | | 232.5, and 233.2 1/4 inch calcite stringers 80° to long core axis | | | | | | | |
| | | | 249 2" quartz carbonate vein 35° to long core axis | | | | | | | |
| | | | Light grey coloured siliceous zones, 229-230, 253-253.5, 264-265, 275-276 with contacts 45 to 50° to long core axis | | | | | | | |
| | | | 301-302 Quartz-carbonate vein 25° to long core axis | | | | | | | |
| | | | 252-253 schistose 40° to long core axis | | | | | | | |
| | | | 302 to 386 Medium grained, massive, rarely fractured, and very slightly calcareous throughout. Trace calcite veinlet average 3 or 4 per 5 feet | | | | | | | |
| | | | 326.3 to 326.8 Internally fractured | | | | | | | |
| | | | 331 2" quartz carbonate vein 45° to long core axis | | | | | | | |
| | | | 336 to 345 slightly schistose 45° to long core axis | | | | | | | |
| | | | 376.5 1" quartz calcite vein 45° to long core axis | | | | | | | |
| | | | 386-417.5 very similar to 220 to 301.5, grey-green coloured, massive to rarely schistose, but intensely fractured with calcite fracture filling. Contact with medium grained section gradational | | | | | | | |
| | | | 394 Quartz carbonate vein 60° to long core axis | | | | | | | |

+ Additional credit available. See Assessment Work Regulations

THE MINING ACT – DEPARTMENT OF MINES

# DIAMOND DRILLING LOG

Start a new page for every new hole, but fill in top portion of form only on first page for each hole.


FILL IN ON EVERY PAGE

| HOLE NO. | PAGE NO. |
|---|---|
| DK-82-6 | 7 |

| | | | | | | |
|---|---|---|---|---|---|---|
| DRILLING COMPANY | | COLLAR ELEVATION | BEARING OF HOLE FROM TRUE NORTH | TOTAL FOOTAGE | DIP OF HOLE AT collar | LOCATION OF HOLE IN RELATION TO A FIXED POINT ON THE CLAIM |
| DATE HOLE STARTED | DATE COMPLETED | DATE LOGGED | LOGGED BY | | ft | |
| EXPLORATION CO., OWNER OR OPTIONEE | | DATE SUBMITTED | SUBMITTED BY (Signature) | | ft | |
| | | | | | ft | |
| | | | | | ft | |

| MAP REFERENCE NO. | CLAIM NO. |
|---|---|
| LOCATION (Tp., Lot, Con. OR Lot. and Long.) | |
| PROPERTY NAME | |

| FOOTAGE FROM | FOOTAGE TO | ROCK TYPE | DESCRIPTION Colour, grain size, texture, minerals, alteration, etc. | PLANAR FEATURE ANGLE * | CORE SPECIMEN FOOTAGE + | YOUR SAMPLE NUMBER | SAMPLE FOOTAGE FROM | SAMPLE FOOTAGE TO | SAMPLE LENGTH | ASSAYS + |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | 417-417.5 Quartz carbonate vein | | | | | | | |
| | | | 417.5-437 As 301 to 386, medium grey coloured, massive, slightly calcareous, occasionally to rarely fractured with calcite fracture. | | | | | | | |
| | | | 431 1/4" inch quartz-carbonate veinlet as fracture filing 15° to long core axis | | | | | | | |
| | | | 437-455 As 386-417.5, aphanitic, grey coloured intensely fractured, core angle 45° | | | | | | | |
| | | | 441-442 30% to 40% quartz vein material with 1 to 1.5% pyrrhotite 70° to long core axis | | | | | | | |
| | | | 451 1" quartz carbonate vein | | | | | | | |
| | | | 453-453.5 Light grey to white quartz carbonate vein material 70° to long core axis | | | | | | | |
| | 455 | | END OF HOLE | | | | | | | |
| | | | Core checked for radioactivity and fluorescence - nothing of economic significance. | | | | | | | |

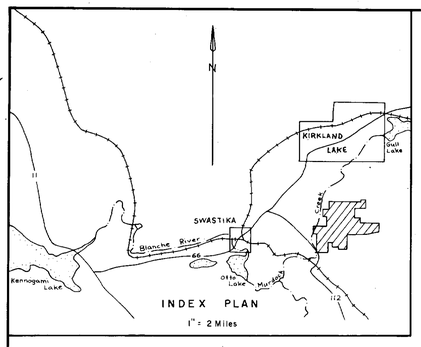


L133E L136E L139E L142E L145E L148E L151E L154E L157E L160E L163E L166E L169E

P4 CL 636798 — PI CL 636798 — PI CL 636799 — PI CL 636800 — PI CL 63

L636798 L636799 L636800 L636796

L121E L124E L127E L130E

PI CL 626766

P4 CL 626766 L118E

L115E

L626766 L620930 L620931

L620929

P2 CL 626766

P3 CL 626766

L566532 L565138

L545728

L100E L103E L106E L109E L112E L115E L118E L121E L124E

PI CL 495721

P4 CL 495720

Baseline 100+00N

DK-82-1

DK-82-3

L565133 L565150

P3 CL 565150

L495721 L545729

L495720

DK-82-2

P4 CL 626769

L626767

P3 CL 495720

P1 CL 495722

P1 CL 620932

L495722 L626769 L620932

DK-82-4

P2 CL 495722

P3 CL 495722

P3 CL 626769

P2 CL626769

P3 CL 620932

P2 CL 620932

L157E L160E L163E L166E L169E L172E L175E L178E L181E

Tieline 135+00N

PI CL 636799 PI CL 636800 PI CL 636796 PI CL 636797

L636797 L636800 L636796

P3 CL 636797 P2 CL 636797

PI CL 620931

Tieline 120+00N

L620931 L620930

PI CL 565138 PI CL 565139

L172E L175E

L565139 L565138

P4 CL 565134

DK-82-6

L178E L181E L184E L187E L190E L193E L196E L199E L202E

PI CL 565135 P4 CL 565135

Baseline 100+00N

L565135 L565134

P2 CL 565135 P3 CL 565135

P2 CL 565152

L565152

P3 CL 565150

L565150

L626767

P1 CL 620932

20932

P2 CL 620932

TECK TWP.

LEBEL TWP.

N

10°

200ft 0 500ft

100m 0 200m

| | | |
|---|---|---|
| DATE APRIL, 82 | LABRADOR EXPLORATION (ONTARIO) LIMITED | SCALE 1" = 200' |
| DRAWN BY | DYMENT-KIDSTON "A" PROJECT | FIGURE NO. |
| | TECK TOWNSHIP, ONTARIO | |
| | DIAMOND DRILL HOLE LOCATION PLAN | |